



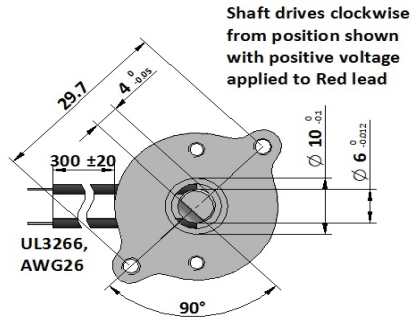


GEEPLUS

BRS2644

Device drawn with shaft aligned to mid position
 Nominal 32Ω , 140mH for operation at 12V , $100\%\text{ED}$
 Rotor Inertia 2.1 gcm^2
 Life Expectancy $>10\text{M}$ cycles, no load, 60° rotation
 Mass 80 grammes
 Insulation Resistance $>100\text{M}\Omega$, 500VDC Megger
 Dielectric Strength 1000vAC , $50/60\text{Hz}$, 1 minute
 Class E (120°C) insulation class

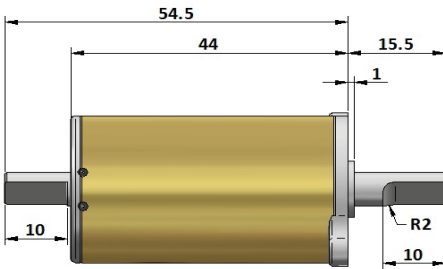

Torque (mNm) vs Angle

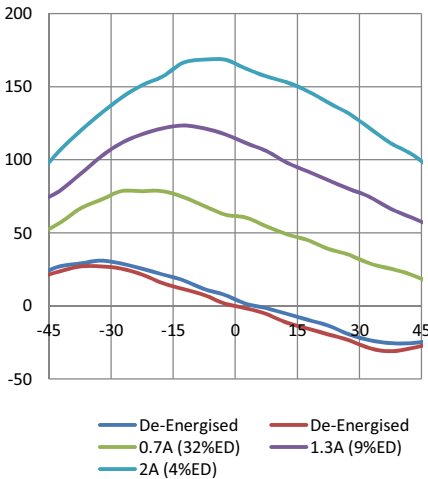

Response (ms) vs Load Inertia (gcm²)

