

No.240 PRODUCT HIGHLIGHTS A selection of products from our LAMP. brand






History of SUGATSUNE

Offices in Japan

Tokyo Head Office



1930

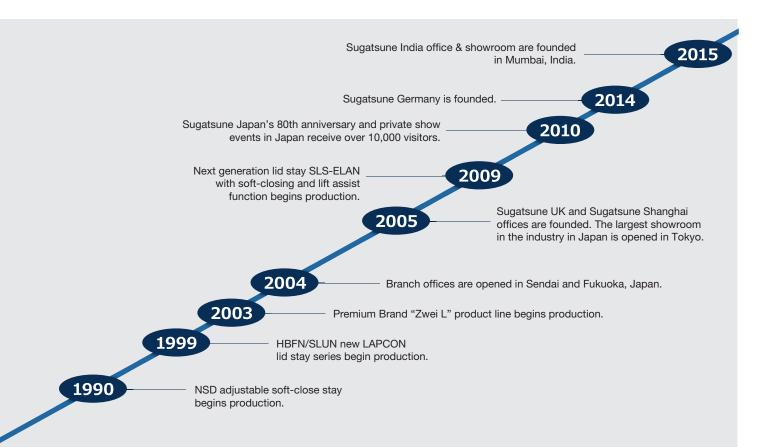

Overseas Branches

Reading, UK



California, USA



Shanghai, CHINA



Chicago, USA



Guangzhou, CHINA



Düsseldorf, GERMANY







Experience meets innovation


SUGATSUNE hardware stands out thanks to the highest guality and innovative design. As a Japanese manufacturer of premium furniture, architectural and industrial hardware steeped in tradition, SUGATSUNE is highly regarded throughout the world. Our customers commend our 6,000+ products for their functionality, durability and our attention to detail.

Whether excellent handles and knobs, hinges, or spacesaving opening mechanisms, you are bound to find whatever special solution you are looking for!

Interior architects as well as customers from the marine and the medical industry alike are thrilled with the wide range including numerous stainless steel products.

Thanks to our branch in Düsseldorf, Germany, SUGATSUNE EUROPE GMBH is now able to assist customers in Europe* with any questions in both German and English. We can also ensure short delivery times throughout Europe due to our on-site warehouse and a constantly growing sales network. We look forward to supporting you in finding the perfect solution for your project.



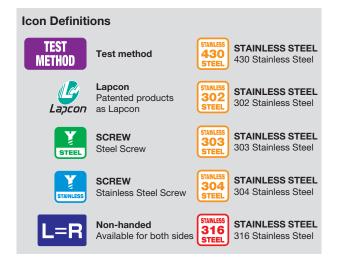



PRODUCTS

HANDLES, PULLS & KNOBS	5
HOOKS	6–7
CATCHES & LATCHES	. 8–10
HINGES	11–13
LID SUPPORTS	15–17
DRAWER SLIDES	18
ARCHITECTURAL DOOR HARDWARE	19
WARDROBE & CABINET DOOR HARDWARE	20–21
MISCELLANEOUS	22–23

is the name of the SUGATSUNE Lapcon patented dampening technology.

LAMP. is a SUGATSUNE brand.





STAINLESS STEEL HANDLE **XL-JS**

- Material Stainless Steel (SUS316)
- Finish Combination of Mirror and Satin



STAINLESS STEEL HANDLE FT-200, FT-280

- Material Stainless Steel (SUS316)
- 30 ■ Finish Mirror



STAINLESS STEEL HANDLE US

Features

- Rubber grip allows for an easy and
- comfortable grip - Light weight design
- Material
 Elastomer (TPE)
 Stainless Steel (SUS304)
- Finish
- Satin
- Mirror



RECESSED PULL UTZ-130

- Material
- Zinc Alloy (ZDC)
 Plastic
- Plastic
- Finish
 Satin Nickel
 Chrome
- Bronze



STAINLESS STEEL HATCH PULL ST-90, ST-115

Finish

Satin

 Material Stainless Steel (SUS304)



TRUNK HANDLE MUD-140

- Material
- Body Zinc Alloy (ZDC)
- Grip Zinc Alloy (ZDC) / Elastomer (TPE)

Finish/Colour

- Body
- Chrome Grip
- Chrome / Black



STAINLESS STEEL KNOB **RSS**

- Material Stainless Steel (SUS304)
- Finish
 Satin
 Mirror



Finish

Mirror

STAINLESS STEEL PULL RD

 Material Stainless Steel (SCS14)



KNOB **EXSEL**


 Material Aluminium Alloy Finish Stainless Anodized



LATCH HOOK **EN-R100F**

Features

- Clip to prevent hooked items from falling off Suitable for exterior
- use (e.g. marine, housing, shops and leashes for pets)



Finish Mirror



Finish

Mirror

LATCH HOOK **EN-E107**

Features Clip to prevent hooked items from falling off

One push release for wide opening



LARGE LATCH HOOK **JN-T100**

- Features
 - Swivels 180° Hook has constant torque when
- Finish Mirror
- swivelling Clip to prevent
- hooked items from falling off



> Catalogue page 130

BUTTERFLY HOOK DZ-270

- Features
- Can be installed on flat surface, corner and edge
- Finish
- Polished



SWING HOOK UC

Swings 180°

Features

Finish

Polished



ROTATING SWING HOOK RF-U50

- Features Rotates 360° and swings 180°
- Finish Satin

Both vertical and horizontal use possible





SWING HOOK TK. TKF

Features w/ friction type and w/o friction type available





Finish

Polished

BUTTERFLY HOOK TZ-360

Features Can be used in various applications



HOOK FC

- Features
- The rounded tip provides safety Titanium screws available by special order

Finish Shot Blast / Mirror

- Swings 180°



Finish

Polished

WIRE HOOK TY

Features The rounded tip provides safety

TEST Method 4 304 10000 Catalogue page 133

Finish

Polished

WIRE HOOK TF

- Features
- The rounded tip provides safety



WIRE HOOK TL

- Features The rounded tip provides safety
- Finish Polished

TEST METHOD 4 Y > Catalogue page 134

HOOK EU

- Features
- Can hang 3 items at same time
- Two-tip shape ideal to hang hats, caps etc.
- Finish Mirror



HOOK HJ

- Features
 - Perfect as a hanger underneath tables, bars etc.



Finish

Satin / Black



HOOK KB-H

Finish Mirror



COAT HOOK (PREMIUM WOOD SERIES) PXB-WM

Features

provides

- The contrast of the gentle touch of wood surface and shiny metalic texture creates a unique rectilinear feature Metal core inside the wooden arm
- high-durability Clear coating greatly improves the endurance
- Finish/Colour (Base Cover) Silver / Black



> Catalogue page 146

RUBBER HOOK (VIVID COLOUR) **PXB-GR05-2**

Features

- Simple and safe design Base made of SUS304 provides
- high-durability Offers a wide range



- Red
- Yellow
- White - Green
- Blue
- of colours



> Catalogue page 146

RUBBER HOOK (NORDIC COLOUR) PXB-GN

Features

- Simple and safe
- design Base made of SUS304 provides
- high-durability
- Designed to fit in all kinds of interior
- Colour Dark Grey
 - Brown
 - Beige





METHOD 11 L=R DPL-RO-G DPL-RO-CR Catalogue page 227

PUSH KNOB LATCH DPL

Features

- Safe and smart design: door will be locked when knob is pushed in Can be used for
- overlay and inset door (door thickness: 15-25 mm)
- Door stopper is not needed
- Latch and knob are sold as a set
- Finish
 - Gold (Clear/Paint)
 - Chrome Satin Nickel
- pushed in Can be used for overlay and inset
 - 15-30 mm). For thin door, please



PUSH KNOB LATCH PKL-08

Features

- Safe and smart design: door will be locked when knob is
- door (door thickness:
- use a plastic spacer (sold separately) Finish
 - Gold
- Chrome
- Black Nickel
- Spring loaded latch keeps the door closed



PUSH KNOB LATCH TLP-S

- Features
 - Safe and smart design: door will be locked when knob is pushed in
 - Flexible to suit door thickness by
 - adjusting screw
- Chrome Gold

Finish

Satin Nickel

19–30 mm)

Can be used for

overlay and inset

door (door thickness:

Y

STEEL **ML-120BR ML-120W**

MAGNETIC TOUCH LATCH **ML-120**

- Features
- The rotary cam mechanism offers a longer life than the usual spring
- mechanism No handle needed, just push to open/ close



NON-MAGNETIC TOUCH LATCH MLC-HT130BL

Features

- to 120°C) and long stroke
- close
- > Catalogue page 242

NON-MAGNETIC TOUCH LATCH **MC-37F**

Features

- ±3.5 mm horizontally
 - close Floating strike for
 - Passed 100,000

- No handle needed,

just push to open/

Colour Black

> Catalogue page 243

- Brown
- White
- Non magnetic times opening and closing test
- easy alignment



Catalogue page 246

KNUCKLE CATCH NAC

- Features
 - Holds door tightly and suitable for large door
 - High durability
 - Can be used for
 - overlay and inset door

TEST METHOD 10 JC-24B JC-24

> Catalogue page 246

KNUCKLE CATCH JC-24/26

Features

LAMP


- Resin body prevents rust Suitable for general
 - furniture, kitchen equipment and marine hardware
- Can be used for overlay and inset door



> Catalogue page 246

ROTARY CATCH RC6900

- Features Resin body prevents rust
 - Suitable for general furniture, kitchen equipment and marine hardware
- Passed 100,000 times opening and closing test Can be used for overlay and inset door




Wide adjustment range: ±2 mm

- vertically and Passed 100,000
 - times opening and closing test
- Brown / White
- > Catalogue page 238

- Heat-resistance (up
- No handle needed, just push to open/
- Non magnetic

Colour



CATCHES & LATCHES



TENSION CATCH BCTS

- Features
- Can be installed vertically or
- horizontally
- Corrosion resistance: Made of SCS14



MAGNETIC CATCH MC-YS

Features

- Ultra thin magnetic catch ideal for tight space Extra strong
- magnetic force: MC-YS001, MC-YS001P
- Weaker magnetic force: MC-YS002, MC-YS002P



MAGNETIC CATCH MC-159-SUS

Features

Anti rust: made of stainless steel and coated with acrylic resin

Ultra thin and extra

strong magnetic

force

Remarks Max. temperature: 80°C

> Catalogue page 264

MAGNETIC CATCH MC-YC-06

- Features
- Strong die casted _ body
- Small body with strong magnetic force
- Can be installed vertically or horizontally



SEALED MAGNETIC CATCH MC-JM45

Features

- Resin sealing the magnet prevents rusting
- Thin magnetic catch ideal for tight spaces Strong magnetic
- force
- Ideal for kitchen equipment by using with the counter plate MC-JMP45

Colour

- White
- Black



> Catalogue page 271

SEALED MAGNETIC CATCH MC-JM50

Features - Resin body prevents

- rusting Ideal for kitchen or bath equipment by using with the counter plate MC-JMP45



- Black



STAINLESS STEEL DRAW LATCH SCC-TF30

- Finish Mirror
- _ Satin









STAINLESS STEEL COMPRESSION DRAW LATCH SCC-40

Finish Polished



STAINLESS STEEL COMPRESSION LATCH STF-CP140

- Features
- Compression arm with rubber allows to fasten the door tightly
 - Can be used with Padlock PWL
- Compression force is adjustable

Push safety button to

release the lock



STAINLESS STEEL DRAW LATCH **PN-51**

- Features High corrosion (Body: SUS304, Spring: SUS316
- Remarks Key changes are not available



Colour

Brown

White

Grey

Chrome

LEVER LATCH LL-66

Features

- Latch designed to be used on a door without knobs and handles
- Installation position can be adjusted (body: vertical ±1.5 mm, counter plate: horizontal ±1.5 mm)



STAINLESS STEEL LEVER LATCH **LL-66S**

Features

- Corrosion resistance: Made of 316 stainless steel Latch designed to be
- Installation position can be adjusted (body: vertical ±1.5 mm, counter plate: horizontal ±1.5 mm) Can be used in
- used on a door without knobs and handles
- exterior application

Y



SPRING LOADED BARREL BOLT **BL-S**

- Features
- Ideal for harsh and high corrosion environments
- Knob springs back into sleeve to keep bolt in locked or unlocked position
- Can be installed vertically or horizontally
- included for different mountings



SPRING LOADED BARREL BOLT BSS 2, BSS3

Features

- Extra sleeve for locking offers flexibility in application
 - high corrosion environments
- into sleeve to keep
- 2 counter plates included for different
- Finish



Features

- High corrosion
- resistance Latch bolt snaps into

Finish

- the strike to prevent accidental release
- release

Polished

Push tab on strike to



SLIDING DOOR LATCH W/INSIDE **INDICATOR HC-65**

- Features
 - High corrosion resistance Surface mount door
 - latch with indicator
- Non-handed: Can be installed on left or right side
- Finish Satin

STAINLESS 304 L=R FI 2-55 00 FL2-35 > Catalogue page 292

SLIDE BOLT FL2

Features

LAMP

- Ideal for harsh and high corrosion environments
- Easy installation, flat and compact design for various application

L=R Я 3 8 > Catalogue page 293

LEVER BOLT HR35

- Features Ideal for harsh and high corrosion environments
 - Easy installation, flat and compact design for various application
- 2 different counter plates included for different mountings

- > Excerpt from our catalogue No.240

- - 2 counter plates

2 different counter

plates included for

different mountings

Finish


Satin

- Ideal for harsh and
- bolt in locked or unlocked position Can be installed ver-

tically or horizontally

mountings





HINGES



GLASS DOOR CAM LOCK 1300GL

Features

- Dimple key lock series. Ideal for showcase application Reversible key: lock
- and unlock to turn key 360° and cam turns 90°
- Able to remove key when locked and unlocked
- 1 million key changes available



- 2,520 key changes/ Master Key) Keys can be shared with other Million Lock Series
 - rack Available for both
 - Key can be removed when locked



GLASS DOOR CAM LOCK (W/ INDICATOR) 2200GL

- With indicator: Unlocked - Blue, Locked - Red
- Ideal for application of showcase or audio
- right and left swing door



- Master Key system (170 key changes) available at surcharge (1 master only)
- Keys can be shared with 2200 Lock Series



CABINET LOCK 7810

Features

(BL)

- For right-handed doors
- High-security Reversible key. Turn the key 360° to lock
- or unlock Available in Satin Nickel (NI), Chrome (CR), Black Chrome
- Brass cylinder lock with stainless steel bodv
- 1 million key changes available. Master Key system available at surcharge (max. 2,520 key changes
- /Master Key) Keys can be shared
- with other Million Lock Series



GLASS HINGE (OVERLAY, W/ CATCH) XL-GC07-CR

- Features
- Hinge with catch for overlay door of glass cabinet
- Can be used with XL-GC01-CR






INSET GLASS DOOR HINGE (GLASS FRAME TYPE) GH-450G

Features

- Suitable for showcases Mounting position adjustable:
- Finish/Colour CR - Chrome GC - Gold





Finish Mirror

L=R



3-WAY ADJUSTABLE CONCEALED HINGE


HES3D-70

- Features 3-way adjustment function allows vertical, horizontal, and depth adjustment after hinge installed
- Cover hides all screw heads for clean appearance
- Door weight: max. 9 kg/2 pcs, 12 kg/3 pcs Door thickness:
- min. 19 mm

- 3-WAY ADJUSTABLE CONCEALED HINGE HES3D-90 Finish DC - Satin Chrome
 - Features 3-way adjustment DN - Satin Nickel function allows BL - Black

DC

- vertical, horizontal, and depth adjustment after
- hinge installed Cover hides all screw
- heads for clean appearance Door weight:
- max. 12 kg/2 pcs, 16 kg/3 pcs Door thickness:
- min. 23 mm



3-WAY ADJUSTABLE CONCEALED HINGE

HES3D-120

- Features 3-way adjustment function allows vertical, horizontal, and depth adjustment after hinge installed
- Cover hides all screw heads for clean
- appearance
- Door weight:
- max. 30 kg/2 pcs, 40 kg/3 pcs
 - Door thickness:
- min. 29 mm

Catalogue page 458

GLASS DOOR HINGE XL-GH01-250

- acrylic not required

Colour DC - Satin Chrome DN - Champagne Gold BL - Black

11

BL

> Catalogue page 470

DN

Finish

DC - Satin Chrome

DN - Satin Nickel

BL - Black

- SN Satin nickel Horizontally -2.5 mm

HINGES

SUGATSUNE

OUR HIGH-LIGHT

Catalogue page 368-373

Hinge J95

00

LOCK 1300GL

Hinge 100



HINGES







MOUNTING PLATE **J95-P6T**

- Features Depth adjustment: + 1.5 -2.5 mm Vertical adjustment:
- ± 3 mm
- Overlay distance adjustment: + 0, 4 mm Thickness: 0 mm (Standard)
- Recommended Screw Size 5 raised countersunk head tapping screw or wood screw Finish Nicke

HEAVY DUTY CONCEALED HINGE J95

Features

- 3-way-adjustment function by mounting plate (depth + 1.5 - 2.5 mm, vertical ± 3 mm, overlay [horizontal] + 0 - 4 mm) Fast one touch installation
- Max door weight: 25 kg with 2 pcs, 40 kg with 3 pcs
- It can be used for heavy door applications such as big cabinets in houses or stores
- Advantages:
- Easy and fast adjustment (door can be adjusted by turning adjustment screws.

Horizontal adjustment, vertical adjustment, depth adjustment, and tilting adjustment)

- Flat Design Sold Separately
- Mounting plate J95-P6T
- Finish Nickel

OTHER J95 CONCEALED HINGES:




<u>J9</u>5-24/16T





SERIES 100: 100% STAINLESS STEEL

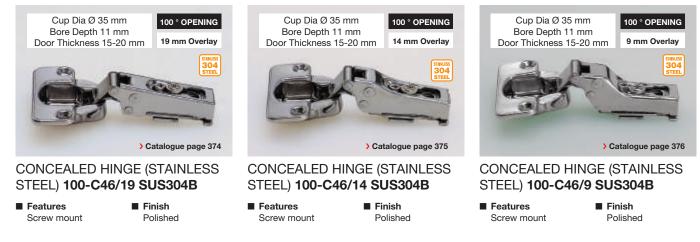


All pictures show the combination of concealed hinge and mounting plate



Lapcon







W/white cover

W/black cover

DAMPER HINGE HG-JHM16

Features

- Hinge with built-in damper to keep lid from slamming shut Mortise mount type
- With marking colour on the edge to recognize the model
- Remarks

Sold in pairs

Still not sure which model is right for your project? Use the Sasuga-kun Selection Tool!

Colour







Sasuga-kun Applicable Products Used for Product Selection & Simulation.



Lapcon



SOFT-DOWN STAY SDS-C301N

Features

- For upward-opening doors
- Can be used with concealed, piano or butt hinges
- SDS-C301 is designed to hold the door in closed and opened position
- Non-handed: can be installed either on left or right side
- Torque
- With 1 stay Torque = 3.92-6.86 N · m (40-70 kgf · cm)
- With 2 stays, the torque will be _ doubled
- Colour
- Black
- White
- Grev

> Catalogue page 518

ADJUSTABLE SOFT-DOWN STAY NSDX-10

Features

- For downward-opening doors Can be used with piano, butt or
- drop hinges
- Designed to hold the door in
- closed position Successfully passed for the 30,000
- open/close private cycle test Opening speed adjustable
- With 2 stays, the torque will be doubled
 - Finish Nickel

TorqueWith 1 stay

Torque = 1.96-6.86 N ⋅ m (20-70 kgf ⋅ cm)



SELF-OPENING STAY HDS-20S

- Features
- Opens automatically after a small impulse
- Ideal for top-opening lids
- Holds the door at closed position -
- Slim design and mounting position maximizes inside space



Torque		
Torque Moment	Model	Qty.
6.9-10.8 N ∙ m	Н	1 pai
10.9-14.7 N · m	S	1 pai

Colour Black

White

> Catalogue page 514

COMPACT SOFT-DOWN STAY CSD-10-TV

Features

- Soft-down stay for down-
- ward-opening flap doors Easy-installed just by aligning the main body to the inside cabinet
- corner Designed for small cabinets such as audio visual furniture
- Opening speed adjustable. The adjustment screw is located on back
- Successfully passed for the 40,000 open/close private cycle test
- CSD-10-TV does not have catch feature. Designed to be used with magnetic catch or touch latch

Torg	ue	

Forque Moment	Model	Qty.
1.0-2.0 N · m	L	1 pc
2.0-3.0 N · m	М	1 pc
3.0-4.0 N · m	Н	1 pc

- Colour
- Black White







FREE-STOP STAY (ONE WAY) S-TAR

Features

- Torque stay for upward-opening, downward-opening and top-opening
- Free stop at any position when lifting up the door
- Friction in one direction only
- _ Light & smooth opening

L-195A-TI

L-270B

- Torque adjustable
- Successfully passed for the 30,000 open/close private cycle test





> Catalogue page 540

type

Finish

Polished

ULTRA MINI LID STAY L-100S, L-140S

Features

- Holds the lid at open position
- Lift up the lid to
- release
- Compact design
- _ Non-handed

Back panel

mount type



MINI LID STAY (W/ LOCK) L-FS140

- Locks the lid at multiple angles For upward-opening,
 - top-opening and swinging doors
- Can be used singly or in pair
- Non-handed
- Finish/Colour Polished, Dark Grey
 - - release

0

LID STAY

Features

position

L-195, L-270

- Non-handed

> Catalogue page 544

TEST METHOD 16 L=R 304

- Finish
- Lift up the lid to

Holds the lid at open

- required per lid
- Satin





SPRING LOADED LID STAY S-YT

- Features Spring mechanism assists lifting the door and holds in opened position
- Remarks Do not use with concealed hinges
- L=R 304 Back panel mount type > Catalogue page 555

HEAVY DUTY SPRING LOADED LID STAY S-AT

- Features Spring mechanism assists lifting the door and holds at any angle (10° - 80°)
- Compact design saves the space inside
- Non-handed
- Torque With 1 stay Torque = 6.1-8.8 · Nm (62-90 kgf · cm) ... S-AT01(S) Torque = .8.8-11.8 N · m (90-120 kgf · cm) ... S-AT02(S)





LIFT-ASSIST DAMPER LAD

Features

6


- Lift-assist mechanism with light opening
- Smooth and soft close movement at the end, preventing flaps from slamming shut
- Ideal for counter flaps at bars, restaurants and receptions Door thickness: 15–25 mm, max. door thickness with spacer LAD-DP is 40 mm
- Can be installed on the backside of a table with bracket
- Successfully passed for the 100,000 open/close private
- cycle test
- Finish
 - Zincing/Nickel, Chrome

Remarks

The Sasuga-kun Selection Tool automatically calculates which model you can use - simply enter the dimensions and weight



Sasuga-kun



Arm unit




Damper unit

TA



DRAWER SLIDES

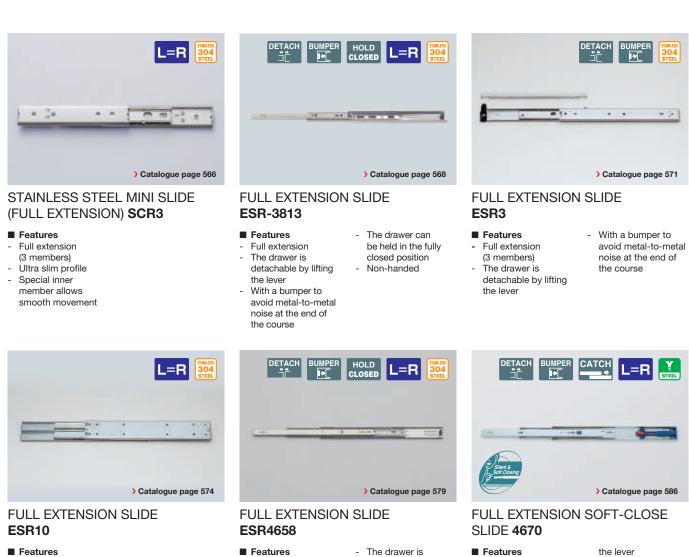

- Full extension
- (3 members)
- Non-handed
- Heavy duty



- Full extension
- (3 members) With a bumper to avoid metal-to-metal noise at the end of

the course

- The drawer is detachable by lifting the lever
- Non-handed



- Features
- Full extension (3 members) With a bumper to avoid metal-to-metal noise at the end of the course

the lever distance from closed mm slide) and at 36 closed position (400-

- The drawer is detachable by lifting
- Self-closes at 20 mm position (250-350 mm distance from 600 mm slide)



FULL EXTENSION SLIDE AR3-K

Features

- Full extension (3 members)
- Non-handed
- The drawer can

LAMP

be held in the fully opened position



ALUMINIUM MINI SLIDE (2-WAY) **ARW2-16**

Features

- 3/4 extension slide (2 members)
- The drawer can be moved to the both directions
- Thin profile for various applications
- Light-weight aluminium body Designed without
 - positive stop for easy assembly. Please add a secondary stop if necessary



ALUMINIUM MINI SLIDE (FULL EXTENSION) AR3-16

- Features
- Full extension (3 members)
- Thin profile for
- various applications
- Light-weight aluminium body

С Lapcon



AVAILABLE NOW:



Right-handed

DOOR DAMPER LDD-V100

Features

- Concealed type
- Easy door opening compared to door closers
- Closing speed adjustable even after installation
- Counter plate has 3-wayadjustment function
- Successfully passed for the 100,000 open/close private

- cycle test Special for room doors Grips door at final 15°
- Door weight: 40-100 kg
- Width: Max. 900 mm, Thickness: 40-60 mm



Right-handed

DOOR DAMPER LDD-V

Features

- Concealed type
- Easy door opening compared to door closers - Closing speed adjustable
- (even after installation) Counter plate has 3-way-
- adjustment function Successfully passed for the 100,000 open/close
- private cycle test
- Special for room doors

Catalogue page

- Grips door at final 10° Door weight: 15-40 kg
- Width: max. 900 mm,
- Thickness: min. 33 mm

19



Catalogue page 629



reddot award 2017 winner




MonoFlat LIN-X hinge. HINGE LIN-X1000 (heavy duty)

Features

- Unique design & easy installation Lateral swing mechanism Allows doors to swing out laterally in a small radius, ideal for tight front space application
- Full access to cabinet
- Door will not get in the way when fully opened
- Smooth movement
- Free stop & soft-close
- Door can be stopped in any position and closes softly - 4-way adjustable
- Adjustment in vertical (±7 mm), horizontal (± 7 mm), depth (±5 mm) and parallel (± 3°)










Minimal space required (max. door width 1,100 mm/effective opening width 930 mm). The door stays out of the way when opening and closing it.

Various Applications

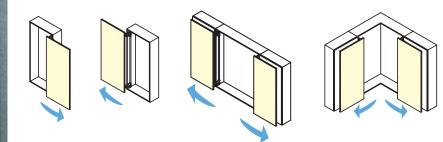



With LIN-X1000



With common swing door



Twin wheel caster

with excellent

stability

TWIN WHEEL CASTER GX60P

Features

Thanks to the light weight aluminium body, the caster is strong and smart looking



TWIN WHEEL CASTER (PLATE TYPE) FA45P

Features Thanks to the light weight aluminium body, the caster is strong and smart looking



SELF-LEVELING GLIDE SAJ

- Features
- Gel inside adjusts automatically to uneven floor
- Self adjustment up to 3 mm or 6 mm
- Suited for environments between -20°C and 75°C
- SAJ-Wrench (sold separately)




MULTI-PURPOSE LID (W/DAMPER) AD-DH

- Features Lid equipped with damper
- Finish Satin
- Corrosion resistance
- Wide opening Operating temperature: 0°C - 40°C



STAINLESS STEEL FUNNEL AE-DH

- Features Disposal of liquids
- Finish - Satin - Mirror



> Catalogue page 793

RING COVER FOR REFUSE BOX AN-DH

- Features Corrosion resistant Wide variations
 - (size/depth/finish)
- Finish Gold -
- Mirror -
- -Satin
- Gold + Clear -

Soft close STANLESS 304 STEEL > Catalogue page 793

MULTI-PURPOSE LID (W/DAMPER) AD-KH017-HL

Finish

Satin

- Features
- Lid equipped with damper
- Corrosion resistant Wide opening
- Operating temperature: 0°C - 40°C



SQUARE COVER FOR REFUSE BOX AN-KH

Features Corrosion resistant



Finish

Satin

Soft close > Catalogue page 798

MULTI-PURPOSE LID (W/DAMPER) **AZ-GD232**

Finish

Satin

Features

Lid equipped with

- damper Opening angle
- adjustable:
- 45° 85°
- With anti-pinching
- plates
- _ Corrosion resistant



MULTI-PURPOSE LID (W/HANDLE) AZ-HD

- Features
- Easy opening with
- handle
- Corrosion resistant



VENTILATOR APK-K

Features

- Smart and simple design
- Small holes (dia. 1.5 mm) prevents insects from entering



INTRODUCTION OF RECESSED PULL WITH VENTILATOR UTA-105

- Features
- With ventilator function

Removable ventilator

and cable grommet

allows easy cleaning

Excellent chemical resistance





VENTILATOR SAD

Features

Max. exhaust area approx. 1880 mm² approx. 3800 mm²






VENTILATOR SAM

Features

Max. exhaust area approx. 290 mm² approx. 570 mm² approx. 1000 mm² approx. 2150 mm² approx. 4480 mm² Model SA-M37 SA-M45 SA-M60 SA-M85 SA-M120



> Catalogue page 816

CABLE GROMMET CHC-S18

- Features Can be split into two parts for easy exchange of LAN cables
- Finish Nickel
- Gold
- Antique Brass
- Black

LN72-WT

LN72-BL

> Catalogue page 820

CABLE GROMMET LN72

Features

- Double sided cable grommet
- Applicable board thickness: 30 mm - 40 mm. Also available for 18 mm - 30 mm thickness board by cutting the slit on
- body Lid is removable for wide opening
- Colour
 - White Black

-

_





> Catalogue page 820

CABLE GROMMET LN72P

- Features Without cap version of LN72S
 - Finish - Chrome - Dull Chrome - Gold



CABLE GROMMET LN72SF

- Features
- 4 different finishes available
- Cap is removable for wide opening
- Colour Main Body White
- Black
- Colour Surface Sheet (sold separately)

- White Black
- Maple
- Mahogany



HANDLES, PULLS & KNOBS

HOOKS

BRACKETS & SHELVING SYSTEMS

CATCHES & LATCHES

LOCKS

HINGES

LID SUPPORTS

DRAWER SLIDES

WARDROBE & CABINET DOOR HARDWARE

ARCHITECTURAL DOOR HARDWARE

CASTERS & LEVELING GLIDES

MISCELLANEOUS

The SUGATSUNE difference

Precision Quality

Our products are designed to meet your exacting standards. SUGATSUNE quality craftsmanship ensures years of trouble-free operation.

Vast Selection

Choose from more than 20,000 items, all manufactured by SUGATSUNE or produced exclusively for us. Each product is created to meet your every need in the global marketplace with extensive local distribution and large inventory.

Customer Satisfaction

You can rely on the SUGATSUNE combination of product and availability to ensure complete satisfaction. Experience our exemplary customer service from the moment of first contact to the time an order is shipped.

Advanced Design

SUGATSUNE is constantly innovating advanced new hardware solutions. Our design and engineering staff stay abreast of the latest trends to bring you exemplary products.

> Furniture & Architectural Hardware

No.240

Find further details and products in our extensive product catalogue No.240 SUGATSUNE Since 1930



SUGATSUNE Europe GmbH Heerdter Lohweg 87-89 40549 Düsseldorf Germany Tel.: +49 (0) 211 / 53812 900 Fax: +49 (0) 211 / 53812 901 sales@sugatsune.eu www.sugatsune.eu Now on Facebook and LinkedIn

HEAD OFFICE

SUGATSUNE KOGYO CO., LTD.

Tokyo, JAPAN Tel.: +81 (0)3 3866 2260 Fax: +81 (0)3 3866 4447 export@sugatsune.co.jp www.sugatsune-intl.com

ASIA

SUGATSUNE SHANGHAI CO.,LTD.

Shanghai, CHINA Tel.: +86-21-3632-1858 Fax: +86-21-3632-1868 lamp@sugatsune.com.cn www.sugatsune.com.cn Guangzhou, CHINA Tel.: +86-20-6639-3552 Fax: +86-20-6230-9772 lamp@sugatsune.com.cn www.sugatsune.com.cn

SUGATSUNE KOGYO INDIA PRIVATE LIMITED Mumbai, INDIA Tel.: +91-22-28314490/91 sales@sugatsune.in

EUROPE

SUGATSUNE KOGYO (UK) LIMITED Reading, UK

Tel.: +44-118-9272-955 Fax: +44-118-9272-871 sales@sugatsune.co.uk www.sugatsune.co.uk

NORTH AMERICA

SUGATSUNE AMERICA, INC. California, USA

Tel.: +1-310-329-6373 Fax: +1-310-329-0819 sales@sugatsune.com www.sugatsune.com

Chicago, USA Tel.: +1-312-461-1081 Fax: +1-312-461-1082 chicagoshowroom@ sugatsune.com

www.sugatsune.com/chicago/