

SS2 STAINLESS STEEL ELECTRIC ACTUATOR WITH INTEGRATED MOTOR

ERD-SS2

The all 300 series stainless-steel ERD for 10, 15 & 20 sizes incorporates hygienic design principles and includes a protective enclosure for Tolomatic stepper/servo motors. (10 size: stepper motor only)
The SS2 has an IP69k rating (static). The SS2 is built-to-order in stroke lengths up to 0.6 m (24").

MULTIPLE SCREW TECHNOLOGIES

YOU CAN CHOOSE:

- Solid nuts of bronze (15, 20 sizes) or engineered resins (10, 15 sizes) offer quiet performance at the lowest cost
- Ball nuts (10, 15, 20 sizes) offer efficiency at a cost effective price



MOTOR PROTECTION

- Designed to protect motor with IP69k rating (static)

DURABLE IP69K SEALS

- Polyurethane for IP69k ingress protection and resistance to caustic wash-down
- Clean-in-place compatible

SMOOTH EXTERIOR

- This primary design decision eases cleanup and helps to prevent bacterial growth

ALL 300 SERIES STAINLESS STEEL CONSTRUCTION

- 300 series stainless steel for corrosion resistance
- Simplifies and lowers cost of machine design by eliminating the need for protective guards around standard actuators



Available Options:

Mounting


- Foot Mounts
- Front Flange
- Trunnion (15 & 20 sizes)

Environmental Protection

- Food grade grease

Sensors

- With mounting bracket

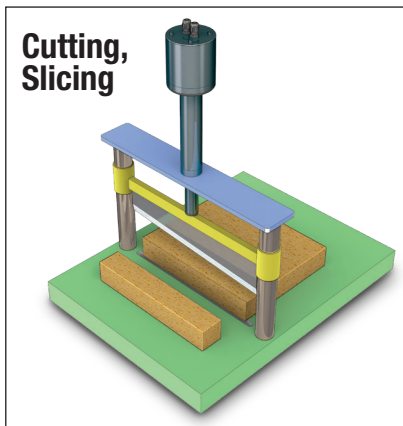

Applications:

- Aligning
- Chopping
- Conveyors
- Cutting
- Diverting
- Dumping
- Filling
- Gating
- Medical equipment
- Open / close doors
- Open / close lids
- Packaging equipment
- Pick & place
- Plate positioning change
- Slicing
- Sorting
- Volumetric pumps & more!

Complete Your System:



EtherNet/IP  
ACS digital servo or stepper drives provide optimal performance with Tolomatic actuators


SS2 STAINLESS STEEL ELECTRIC ACTUATOR WITH INTEGRATED MOTOR

Specifications (metric measurement)

ERD SIZE	MAXIMUM STROKE	SCREW CODE	LEAD	LEAD ACCURACY	BACKLASH	MAXIMUM THRUST	DYNAMIC LOAD RATING
mm			mm/rev	mm/300mm	mm	N	N
10	254.0	SN01	25.4	0.18	0.18	188	NA
		SN02	12.7	0.18	0.18	188	NA
		SN05	5.08	0.18	0.18	188	NA
		BNM05	5.00	0.87	0.13	445	1068
15	304.8	SN01	25.4	0.15	0.18	334	NA
		SN02	12.7	0.13	0.18	334	NA
		SN05	5.08	0.15	0.18	334	NA
	609.6	BNM05	5.00	0.87	0.13	890	2002
		BNM10	10.00	0.87	0.13	890	1779
		BZ10	2.54	0.15	0.20	890	NA
20	609.6	BNM05	5.00	0.87	0.13	2224	4003
		BNM10	10.00	0.87	0.13	2224	4003
		BNM20	20.00	0.87	0.10	2224	11387
		BZ10	2.54	0.15	0.20	2224	NA

ERD-SS2

Dimensions SIZE: 10, 15, 20

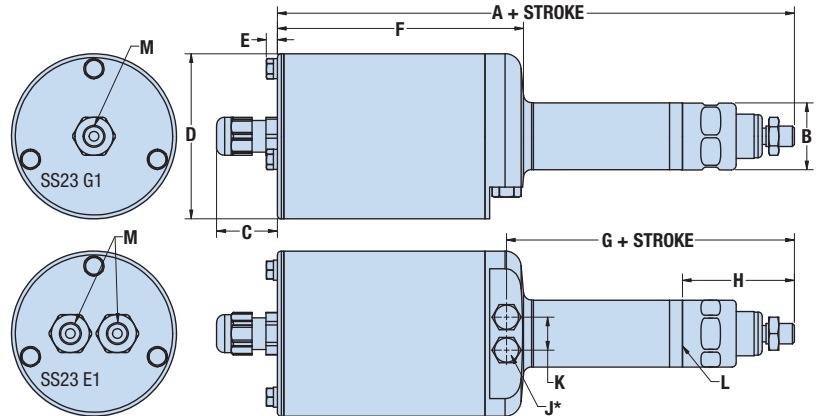

	ERD10	ERD15	ERD20
A mm	204.0	282.70	311.4
B mm	26.42	41.61	52.10
C mm	24.00	24.00	24.00
D mm	65.10	89.00	89.00
E mm	4.39	5.27	5.27
F mm	100.99	134.98	171.64
G mm	113.56	143.76	164.80
H mm	44.17	53.04	72.48
J* mm	M6 x 1.0	M6 x 1.0	M6 x 1.0
K mm	13.00	13.00	23.37
L	Surface for mounting options		




ACTUATOR SIZING

CAD LIBRARY

COMPLETE INFORMATION, SIZING SOFTWARE AND SOLID MODELS AVAILABLE AT:
www.tolomatic.com

	Code	Encoder Code	Available cable exit options:
M	SS21	G1,E1	no cord grips 1/2" NPT tapped hole
	SS22	G1,E1	no cord grips M20 x 1.5 tapped hole
	SS23	G1	1 cord grip (motor, no encoder)
E1		2 cord grips (motor, with encoder)	

*Unit ships standard with hex bolts in these tapped holes
 NOTE: IP67 is a static rating



USA
 3800 County Road 116
 Hamel, MN 55340, USA
Phone: (763) 478-8000
Fax: (763) 478-8080
 Toll-Free: 1-800-328-2174
 sales@tolomatic.com
www.tolomatic.com

CHINA
Tolomatic Automation Products (Suzhou) Co. Ltd.
(ServoWeld® inquiries only)
 No. 60 Chuangye Street, Building 2
 Huqiu District, SND Suzhou
 Jiangsu 215011 - P.R. China
Phone: +86 (512) 6750-8506
Fax: +86 (512) 6750-8507
 ServoWeldChina@tolomatic.com

EUROPE
Tolomatic Europe GmbH
 Elisabethenstr. 20
 65428 Rüsselsheim
 Germany
Phone: +49 6142 17604-0
 help@tolomatic.eu

COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV GL
 = ISO 9001 =
 Certified site: Hamel, MN

All brand and product names are trademarks or registered trademarks of their respective owners. Information in this document is believed accurate at time of printing. However, Tolomatic assumes no responsibility for its use or for any errors that may appear in this document. Tolomatic reserves the right to change the design or operation of the equipment described herein and any associated motion products without notice. Information in this document is subject to change without notice.

Visit www.tolomatic.com for the most up-to-date technical information

© 2019 TOLOMATIC
201904041116
LITERATURE NUMBER: 2190-4006_03