

Argus R70

CANopen®

CONTROL MODES

- Profile Position-Velocity-Torque, Interpolated Position, Homing
- Indexer, Point-to-Point, PVT
- Camming, Gearing

COMMAND INTERFACE

- CANopen
- ASCII and discrete I/O
- Stepper commands
- $\pm 10V$ position/velocity/torque command
- PWM velocity/torque command
- Master encoder (Gearing/Camming)

COMMUNICATIONS

- CANopen
- RS-232
- RS-422

FEEDBACK

Incremental

- Digital quad A/B encoder
- Analog Sin/Cos encoder
- Panasonic Incremental A
- Aux. encoder / encoder out

Absolute

- SSI
- EnDat 2.1 & 2.2
- Absolute A
- Tamagawa Absolute A
- Panasonic Absolute A Format
- Sanyo Denki Absolute A
- BiSS (B&C)

Other

- Digital Halls
- Resolver (-R model)

I/O DIGITAL

- 6 High-speed inputs
- 4 Opto-isolated inputs
- 1 Motor over-temp input
- 4 High-speed outputs
- 4 Opto-isolated outputs
- 1 Opto-isolated motor brake output

I/O ANALOG

- 1 Reference input, 12-bit

SAFE TORQUE OFF (STO)

- SIL 3, Category 3, PL d

DIMENSIONS: IN [MM]

- 3.10 x 2.40 x 0.92 [78.7 x 60.1 x 23.4]



Model	Ic	Ip	Vdc
R70-055-60	30	60	9~55
R70-055-60-R	30	60	9~55
R70-090-60	30	60	14~90
R70-090-60-R	30	60	14~90

DESCRIPTION

R70 sets new levels of performance, connectivity, and flexibility. The R70 operates as an CAN node using the CANopen protocol of DSP-402 for motion control devices. Supported modes include: Profile Position-Velocity-Torque, Interpolated Position Mode (PVT), and Homing. A wide range of absolute encoders are supported.

Both isolated and high-speed non-isolated I/O are provided. For safety critical applications, redundant power stage enable inputs can be employed.

RUGGEDIZED STANDARDS CONFORMANCE

Ambient Temperature

Non-Operating

-50°C to 85°C

Operating

-40°C to 70°C

Operating

-40°C to 70°C in 1 minute

Thermal Shock

Non-Operating

95% non-condensing at 60°C

Relative Humidity

Operating

95% non-condensing at 60°C

Vibration

Operating

5 Hz to 500 Hz, up to 3.85 grms

Altitude

Non-Operating

-400 m to 16,000 m

Shock

Operating

-400 m to 16,000 m

MIL-STD specifications

Crash Safety

75 g peak acceleration

IEC specifications

Operating

40 g peak acceleration

MIL-STD-

461, 704, 810, 1275, 1399

IEC-

60068, 60079

Argus R70

Test conditions: Wye connected load: 2 mH line-line. Ambient temperature = 25 °C. Power input = 55 Vdc

MODEL	R70-055-60(-R)		R70-090-60(-R)	
OUTPUT CURRENT				
Peak Current	60 (42.4)		60 (42.4)	
Peak time	1		1	
Continuous current	30 (21.2)		30 (21.2)	
Peak Output Power	5.4		5.4	
Continuous Output Power	2.7		2.7	
INPUT POWER				
HVmin to HVmax	+9 to +55		+14 to +90	
Ipeak	60		60	
Icont	30		30	
Aux HV	+9 to +55 Vdc	2.5 W max	Optional keep-alive power input when +HV is removed	
PWM OUTPUTS				
Type	MOSFET 3-phase inverter, 16 kHz center-weighted PWM carrier, space-vector modulation			
PWM ripple frequency	32 kHz			
DIGITAL CONTROL				
Digital Control Loops	Current, velocity, position. 100% digital loop control			
Sampling rate (time)	Current loop: 16 kHz (62.5 μs), Velocity & position loops: 4 kHz (250 μs)			
PWM frequency	16 kHz			
Bus voltage compensation	Changes in bus or mains voltage do not affect bandwidth			
Minimum load inductance	250 μH line-line			
Resolution	12-bit capture of U & V phase currents			
COMMAND INPUTS				
CANopen	Galvanically isolated from drive circuits			
Stand-alone mode				
Analog torque, velocity, position reference	±10 Vdc, 12 bit resolution		Dedicated differential analog input	
Digital position reference	Pulse/Direction, CW/CCW		Stepper commands (4 MHz maximum rate)	
Digital torque & velocity reference	Quad A/B Encoder		2 M line/sec, 8 Mcount/sec (after quadrature)	
	PWM , Polarity		PWM = 0% - 100%, Polarity = 1/0	
	PWM 50%		PWM = 50% ±50%, no polarity signal required	
	PWM frequency range		1 kHz minimum, 100 kHz maximum	
	PWM minimum pulse width		220 ns	
Indexing	Up to 32 sequences can be launched from inputs or ASCII commands.			
Camming	Up to 10 CAM tables can be stored in flash memory			
ASCII	RS-232, 9600~115,200 Baud, 3-wire, RJ-11 connector			
DIGITAL INPUTS				
Number	11			
[IN1,2,3,4,5,6]	Digital, non-isolated, Schmitt trigger, 0.1 μs RC filter, 12 Vdc compatible, 10k pull-up to +5 Vdc			
[IN7,8,9,10]	Vt+ = 2.5~3.5 Vdc max, Vt- = 1.3~2.2 Vdc min, Vh = 0.7~1.5 Vdc, SLI port MISO signal			
[IN11]	Digital, opto-isolated, single-ended, ±15~30 Vdc compatible, bi-polar, with common return			
	Rated impulse ≥ 800 V, Vin-LO ≤ 6.0 Vdc, Vin-HI ≥ 10.0 Vdc, Input current ±3.6 mA @ ±24 Vdc, typical			
	Maximum working voltage with respect to ground: 32 Vdc			
Functions	Defaults as motor overtemp input on feedback connector, 24 Vdc max, programmable to other functions			
	Other digital inputs are also programmable for the Motemp function			
	330 μs RC filter, 4.99k pull-up to +5 Vdc, Vt+ = 2.5~3.5 Vdc, Vt- = 1.3~2.2 Vdc, VH = 0.7~1.5 Vdc			
All inputs are programmable, [IN1] defaults to the Enable function and is programmable for other functions.				
ANALOG INPUT				
[AIN±]	Differential, ±10 Vdc, 5 kΩ input impedance, 12-bit resolution			
	Bandwidth (-3 dB) of analog signal path: 14 kHz, common-mode range -10 to +15 Vdc			
DIGITAL OUTPUTS				
Number	9			
[OUT1~4]	Isolated, two-terminal SSR with 1 Ω series resistor and 36 V Zener diode for driving inductive loads			
[OUT5~8]	Ton = 5 ms max, @ 300 mA, Toff = 2 ms max @ 300 mA			
	Maximum working voltage with respect to ground: 32 Vdc, rated impulse voltage ≥ 800 Vdc			
	High speed, SLI port MOSI, SCLK, & EN1 signals, 74AHCT125 line drivers; +5 Vdc tolerant			
[BRAKE]	Output current: ±25 mA max @ ±5 Vdc			
	Isolated, MOSFET, 1 A max, external flyback diode required, Turn-ON & Turn-OFF delay 250 μs max			
	GATE output can drive an external MOSFET for brakes requiring higher current			
Functions	Maximum working voltage with respect to ground: 32 Vdc, rated impulse voltage ≥ 800 Vdc			
	Default functions are shown above, programmable to other functions			
RS-232 PORT				
Signals	RxD, TxD, Gnd in 6-position, 4-contact RJ-11 style modular connector, non-isolated			
Mode	Full-duplex, DTE serial communication port for drive setup and control, 9,600 to 115,200 baud			
Protocol	Binary and ASCII formats			
RS-422 PORT				
Signals	A/Y(+), B/X(-), Gnd from ISL32455 transceiver, optically isolated			
Mode	Half-duplex, RS-422 slave, 9,600 to 230.4 kbps			
Protocol	Binary and ASCII formats			
CAN PORT				
Signals	CAN_H, CAN_L, CAN_GND, optically isolated, max working voltage with respect to signal ground: 32 Vdc			
Protocol	CANopen Device Profile DSP-402 over CANopen (CoE)			

NOTES:

1. Brake output [BRAKE] is programmable as motor brake, or as general purpose digital output.
2. When STO feature is used, the 24V power supply must be a SELV or PELV type with the maximum output voltage limited to 60 Vdc or lower.

DC OUTPUTS

Number	1
Ratings	+5 Vdc @ 500 mA thermal and overload protected

SAFE TORQUE OFF (STO)

Function	PWM outputs are inactive and current to the motor will not be possible when the STO function is activated
Standard	Designed to IEC-61508-1, IEC-61508-2, IEC-61800-5-2, ISO-13849-1
Safety Integrity Level	SIL 3, Category 3, Performance level d
Inputs	2 two-terminal: STO-IN1+, STO-IN1-, STO-IN2+, STO-IN2-
Type	Opto-isolators, 24V compatible, Vin-LO ≤ 6.0 Vdc or open, Vin-HI ≥ 15.0 Vdc,
Input current (typical)	STO-IN1: 11.2 mA, STO-IN2: 11.2 mA
Response time	2 ms from Vin ≤ 6.0 Vdc to interruption of energy supplied to motor
Muting	An internal current source wired to STO inputs will mute (bypass) the STO function

PROTECTIONS

HV Overvoltage -055 models	+HV > 55 Vdc	Drive outputs turn off until +HV ≤ 55 Vdc
HV Undervoltage -055 models	+HV < 9 Vdc	Drive outputs turn off until +HV ≥ 9 Vdc
HV Overvoltage -090 models	+HV > 90 Vdc	Drive outputs turn off until +HV ≤ 90 Vdc
HV Undervoltage -090 models	+HV < 14 Vdc	Drive outputs turn off until +HV ≥ 14 Vdc
Drive over temperature	Heat plate > 70°C.	Drive outputs turn off
Short circuits		Output to output, output to ground, internal PWM bridge faults
I ² T Current limiting		Programmable: continuous current, peak current, peak time
Motor over temperature		Digital inputs programmable to detect motor temperature switch
Feedback Loss		Inadequate analog encoder amplitude or missing incremental encoder signals

MECHANICAL & ENVIRONMENTAL

Size mm [in]	3.10 x 2.40 x 0.92 [78.7 x 60.1 x 23.4]
Weight	4.2 oz (120 g) without heatsink
Ambient temperature	0 to +45°C operating, -40 to +85°C storage
Humidity	0 to 95%, non-condensing
Vibration	2 g peak, 10~500 Hz (sine), IEC60068-2-6
Shock	10 g, 10 ms, half-sine pulse, IEC60068-2-27
Contaminants	Pollution degree 2
Environment	IEC68-2
Cooling	Heat sink and/or forced air cooling required for continuous power output
Altitude	≤ 2000 m (6560 ft) per IEC 60068-2-13

AGENCY STANDARDS CONFORMANCE

Standards and Directives

Functional Safety (PENDING)

IEC 61508-1, IEC 61508-2
Directive 2006/42/EC (Machinery)
EN (ISO) 13849-1, EN (ISO) 13849-2, IEC 61800-5-2

Electrical Safety (PENDING)

Directive 2014/35/EU (Low Voltage)
UL 61800-5-1, IEC 61800-5-1

EMC

Directive 2014/30/EU
IEC 61800-3
IEC 61800-5-2


Restriction of the Use of Certain Hazardous Substances (RoHS)

Directive 2011/65/EU (RoHS II)

Approvals (PENDING)

UL and cUL recognized component to:
UL 61800-5-1

UL Functional Safety Certification to:
IEC 61508-1, ISO 13849-1, IEC 61508-5-2

 DANGER	Refer to the 16-01600 Argus GEM & GPM STO Manual
	<p>The information provided in the 16-01600 Argus GEM & GPM STO Manual must be considered for any application using the GEM drive STO feature.</p> <p>Failure to heed this warning can cause equipment damage, injury, or death.</p>



Argus R70

FEEDBACK

Incremental encoders:

Digital Incremental Encoder	Quadrature signals, (A, /A, B, /B, X, /X), differential (X, /X Index signals not required) MAX3097 differential line receivers for A, B and X, 5 MHz maximum line frequency (20 M counts/sec) Fault detection for open/shorted inputs, or low signal amplitude, selectable for A B X or A B
Analog Incremental Encoder	Sin/Cos, differential, internal 121Ω terminators between ± inputs, 1.0 Vp-p typical, 1.45 Vp-p maximum, Common-mode voltage 0.25 to 3.75 Vdc, ±0.25 V, centered about 2.5 Vdc Signals: Sin(+), Sin(-), Cos(+), Cos(-), Frequency: 230 kHz maximum line (cycle) frequency, interpolation 12 bits/cycle (4096 counts/cycle)

Absolute encoders:

Heidenhain EnDat 2.2, SSI	Serial Clock (X, /X), Data (S, /S) signals, differential 4-wire, External 121Ω terminator required for Clock, 221Ω for Data
Heidenhain EnDat 2.1	Clock (X, /X), Data (S, /S), Sin/Cos (Sin+, Sin-, Cos+, Cos-) signals Internal 121Ω terminators between Sin/Cos inputs, External 121Ω terminator required for Clock, 221Ω for Data
Absolute A, Tamagawa Absolute A, Panasonic Absolute A Format	SD+, SD- (S, /S) signals, 2.5 or 4 MHz, 2-wire half-duplex, external 221Ω terminator required Position feedback: 13-bit resolution per rev, 16 bit revolution counter (29 bit absolute position data)
BiSS (B&C)	Status data for encoder operating conditions and errors MA+, MA- (X, /X), SL+, SL- (S, /S) signals, 4-wire, clock output from drive, data returned from encoder External 121Ω terminator required for MA, 221Ω for SL

Resolver:

Type	Brushless, single-speed, 1:1 to 2:1 programmable transformation ratio
Resolution	14 bits (equivalent to a 4096 line quadrature encoder)
Reference frequency	8.0 kHz
Reference voltage	2.8 Vrms, auto-adjustable by the drive to maximize feedback
Reference maximum current	100 mA
Maximum RPM	10,000+

HALLS

Digital:

U, V, W: Single-ended, 120° electrical phase difference between U-V-W signals,
Schmitt trigger, 1.5 μs RC filter, 24 Vdc compatible, 15 kΩ pull-up to +5 Vdc
Vt+ = 2.5~3.5 Vdc, VT- = 1.3~2.2 Vdc, VH = 0.7~1.5 Vdc

Analog:

U & V: Sin/Cos format (Sin+, Sin-, Cos+, Cos-), differential, 1 Vpeak-peak ±20%, ServoTube motor compatible,
BW > 300 kHz, 121 Ω terminating resistors between Sin+ & Sin-, Cos+ & Cos- inputs
12-bit resolution, BW > 300 kHz, with zero-crossing detection

MULTI-MODE ENCODER PORT

As Input:

See Digital Incremental Encoder above for electrical data on A, B, & X channels, or
Absolute encoders using X or S channels. External terminators required as shown above

As Emulated Output:

Quadrature A/B encoder emulation with programmable resolution to 4096 lines (65,536 counts)
per rev from analog Sin/Cos encoders or resolvers.

As Buffered Output:

A, /A, B, /B, outputs from MAX3032 differential line driver, X, /X, S, /S from MAX 3362 line drivers
Digital A/B/X encoder signals from primary digital encoder are buffered as shown above, 5 MHz max

5V OUTPUT

Number	1
Ratings	+5 Vdc @ 500 mA thermal and overload protected

CANOPEN COMMUNICATIONS

Based on the CAN V2.0b physical layer, a robust, two-wire communication bus originally designed for automotive use where low-cost and noise-immunity are essential, CANopen adds support for motion-control devices and command synchronization. The result is a highly effective combination of data-rate and low cost for multi-axis motion control systems. Device synchronization enables multiple axes to coordinate moves as if they were driven from a single control card.

CANOPEN COMMUNICATION


Argus uses the CAN physical layer signals CANH, CANL, and GND for connection, and CANopen protocol for communication. Before installing the drive in a CAN system, it must be assigned a CAN Node-ID (address). A maximum of 127 CAN nodes are allowed on a single CAN bus. Up to seven digital inputs can be used to produce CAN Node-IDs from 1~127, or the Node-ID can be saved to flash memory in the module. Node-ID 0 is reserved for the CANopen master on the network.

For more information on CANopen communications, download the CANopen Manual from the Copley web-site: http://www.copleycontrols.com/wp-content/uploads/2018/02/All-CANopen_Programmers_Manual-Manual.pdf

DIGITAL COMMAND INPUTS

The graphic below shows connections between the R70 and a Dsub 9M connector on a CAN card. If the R70 is the last node on a CAN bus, the internal terminator resistor can be used by adding a connection on the PC board as shown. The node Node-ID of the R70 may be set by using digital inputs, or programmed into flash memory in the drive.


CME2 -> Basic Setup -> Operating Mode Options

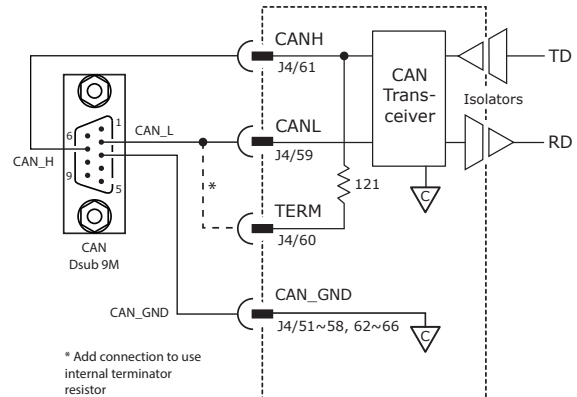

RS-232 COMMUNICATIONS


R70 is configured via a three-wire, full-duplex DTE RS-232 port that operates from 9600 to 115,200 Baud, 8 bits, no parity, and one stop bit. Signal format is full-duplex, 3-wire, DTE using Rx, Tx, and Gnd. Connections to the R70 RS-232 port are through P4. The graphic below shows the connections between an R70 and a computer COM port which is a DTE device.

CME2 -> Tools -> Communications Wizard

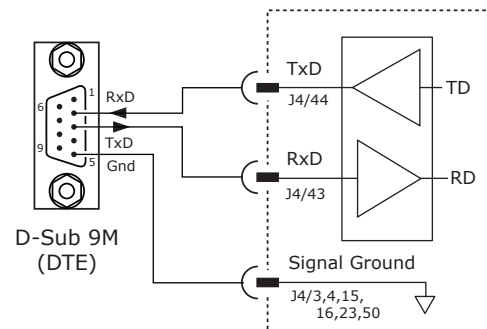

RS-422 COMMUNICATIONS

RS-422 is a two-wire differential half-duplex port that operates from 9600 to 230.4 kbps. Connections to the R70 RS-232 port are through P4. The graphic below shows the connections between a R70 and a computer RS-422 port.

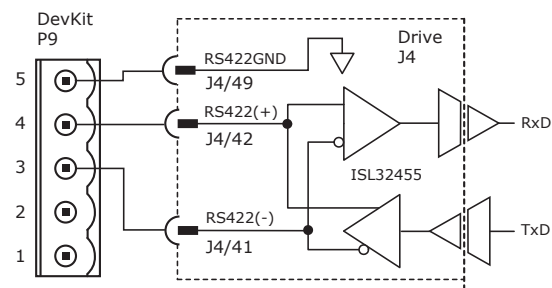


Argus R70

SAFE TORQUE OFF (STO)

DESCRIPTION

The R70 provides the Safe Torque Off (STO) function as defined in IEC 61800-5-2. Three opto-couplers are provided which, when de-energized, prevent the upper and lower devices in the PWM outputs from being operated by the digital control core. This provides a positive OFF capability that cannot be overridden by the control firmware, or associated hardware components. When the opto-couplers are activated (current is flowing in the input diodes), the control core will be able to control the on/off state of the PWM outputs.

INSTALLATION


 DANGER	Refer to the 16-01600 Argus GEM & GPM STO Manual
	<p>The information provided in the 16-01600 Argus GEM & GPM STO Manual must be considered for any application using the GEM drive STO feature.</p> <p>Failure to heed this warning can cause equipment damage, injury, or death.</p>

STO BYPASS (MUTING)

In order for the PWM outputs of the drive to be activated, current must be flowing through all of the opto-couplers that are connected to the STO-1 and STO-2 terminals of J3, and the drive must be in an ENABLED state. When the opto-couplers are OFF, the drive is in a Safe Torque Off (STO) state and the PWM outputs cannot be activated by the control core to drive a motor. This diagram shows connections that will energize all of the opto-couplers from an internal current-source. When this is done the STO feature is overridden and control of the output PWM stage is under control of the digital control core.

If not using the STO feature, these connections must be made in order for the drive to be enabled.

STO BYPASS CONNECTIONS

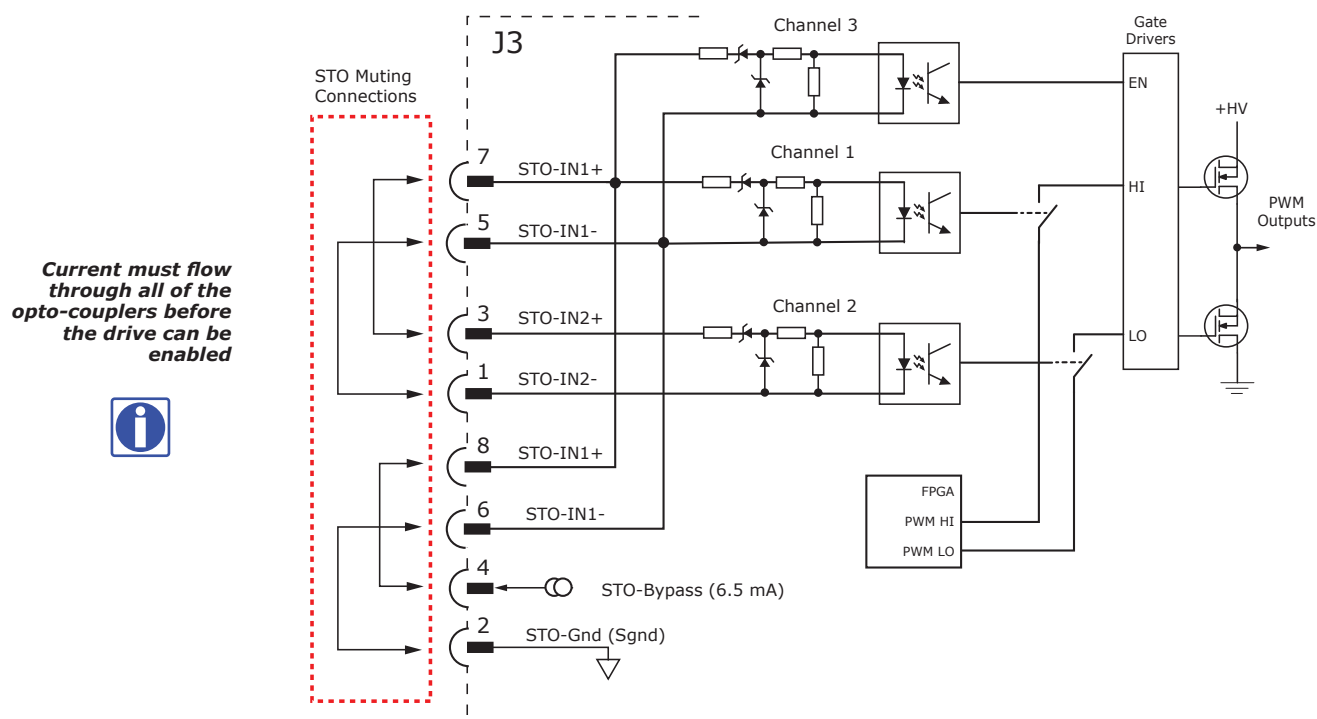


J3 SIGNALS


SIGNAL	PIN	PIN	SIGNAL
STO-IN2(-)	1	2	STO-GND
STO-IN2(+)	3	4	STO-BYPASS
STO-IN1(-)	5	6	STO-IN1(-)
STO-IN1(+)	7	8	STO-IN1(+)

DIGITAL COMMAND INPUTS: POSITION


PULSE & DIRECTION

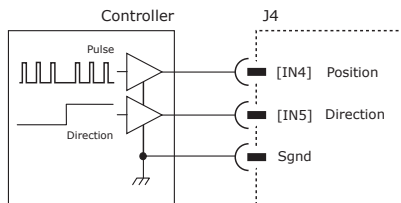

CU/CD

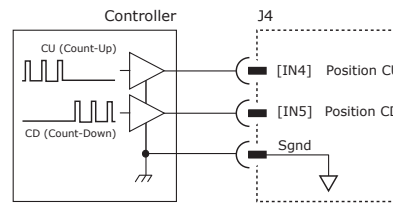

QUAD A/B ENCODER

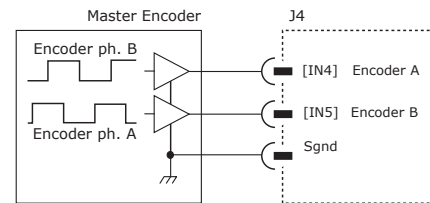

CME2 -> Basic Setup -> Operating Mode Options

Operating Mode:

Command Source:

CME2 -> Basic Setup -> Operating Mode Options

Control Input:

☒ Pulse and Direction ☐ Pulse Up / Pulse Down ☐ Quadrature

Increment Position on:

☒ Rising Edge ☐ Falling Edge


Stepping Resolution

Input Pulses = Output Counts


☐ Invert Command

DIGITAL COMMAND INPUTS: VELOCITY-TORQUE

PWM & DIRECTION

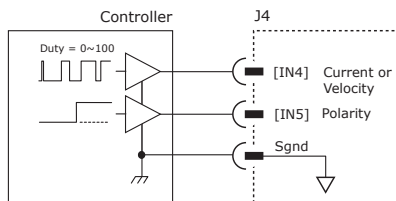

50% PWM

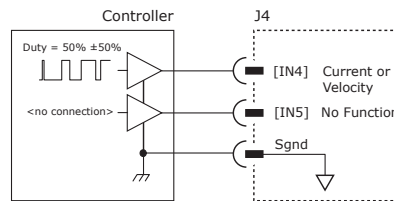

CME2 -> Basic Setup -> Operating Mode Options

Operating Mode:

Command Source:

CME2 -> Main Page-> PWM Command

Scaling: rpm at 100% duty cycle

Input Type:

☒ 50% Duty Cycle ☐ 100% Duty Cycle

☐ Enable Deadband

Deadband: % = 0 rpm

Options:

☐ Invert PWM Input

☐ Allow 100% Output

☐ Invert Sign Input


CONNECTIONS

Input	J4 Pins
IN4	19
IN5	22
Sgnd	3,4,15,16,23,50

MULTI-MODE ENCODER PORT AS AN INPUT


POSITION COMMAND INPUTS: DIFFERENTIAL

- Pulse & Direction
- CW & CCW (Clockwise & Counter-Clockwise)
- Encoder Quad A & B
- Camming Encoder A & B input

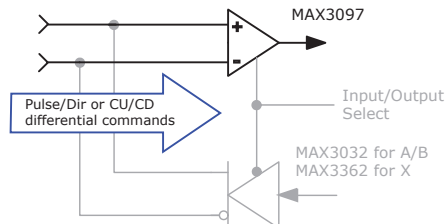


CURRENT or VELOCITY COMMAND INPUTS: DIFFERENTIAL

- Current/Velocity Magnitude & Direction
- Current/Velocity 50%

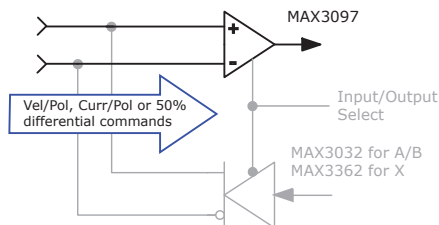



SECONDARY FEEDBACK: INCREMENTAL

- Quad A/B/X incremental encoder

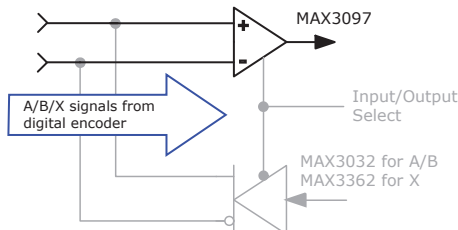


SECONDARY FEEDBACK: ABSOLUTE

- S channel: Absolute A encoders (2-wire)
The S channel first sends a Clock signal and then receives Data from the encoder in half-duplex mode.
- S & X channels: SSI, BiSS, EnDat encoders (4-wire)
The X channel sends the Clock signal to the encoder, which initiates data transmission from the encoder on the S-channel in full-duplex mode

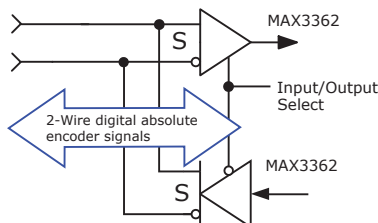

SIGNALS & PINS

Signal	J4 Pins
Pulse, CW, Encoder A, Vel-Curr-Mag, Vel-Curr-50%	8
/Pulse, /CW, Encoder /A, /Vel-Curr-Mag, /Vel-Curr-50%	7
Direction, CCW, Encoder B, Vel-Curr-Pol	10
/Direction, /CCW, Encoder /B, /Vel-Curr-Pol	9
Quad Enc X, Absolute Clock	14
Quad Enc /X, /Absolute Clock	13
Enc S, Absolute (Clock) Data	12
Enc /S, / Absolute (Clock) Data	11
Signal Ground	3,4,15,16, 23,50

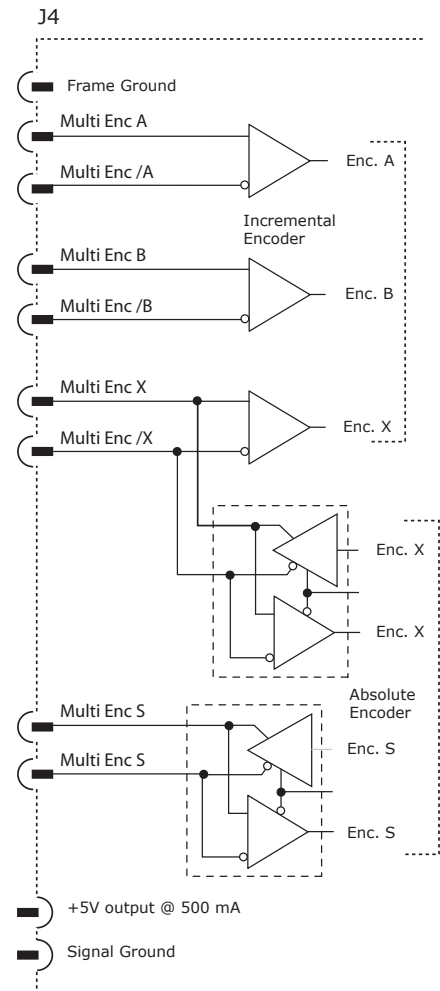

MULTI-MODE ENCODER PORT AS AN OUTPUT

OUTPUT TYPES

BUFFERED FEEDBACK OUTPUTS: DIFFERENTIAL

- Encoder Quad A, B, X channels
- Direct hardware connection between quad A/B/X encoder feedback and differential line drivers for A/B/X outputs


EMULATED FEEDBACK OUTPUTS: DIFFERENTIAL

Firmware produces emulated quad A/B signals from feedback data from the following devices:


- Absolute encoders
- Analog Sin/Cos incremental encoders

SIGNALS & PINS


Signal	J4 Pins
Encoder A	8
Encoder /A	7
Encoder B	10
Encoder /B	9
Encoder X	14
Encoder /X	13
Signal Ground	3,4,15,16,23,50

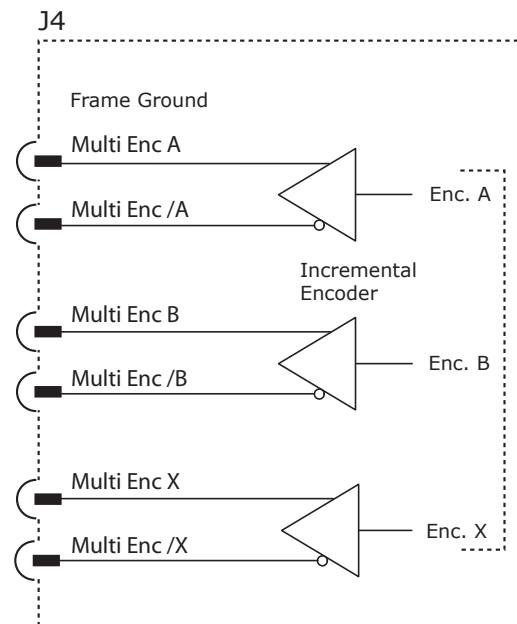

BUFFERED QUAD A/B/X OUTPUTS

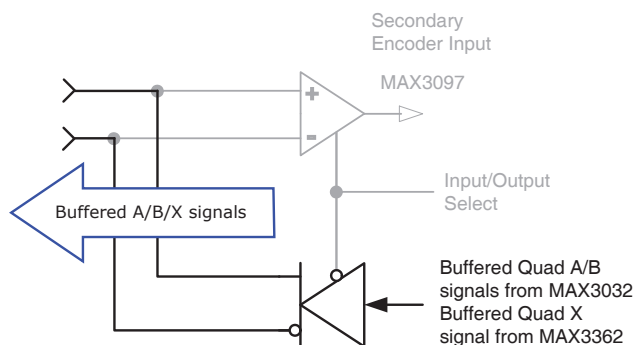

EMULATED QUAD A/B OUTPUTS

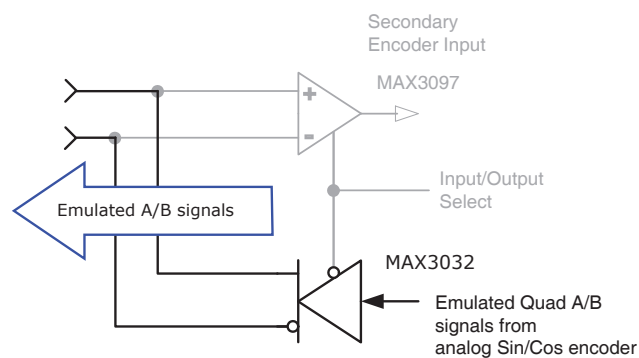

CME2 DEFAULTS

These tables show the CME2 default settings. They are user-programmable and the settings can be saved to non-volatile flash memory.

Input/Output

Digital Inputs | Digital Outputs

Name	Configuration	PU/PD
IN1	Enable-LO, Clear Faults	+5V PU
IN2	Not Configured	+5V/Gnd
IN3		
IN4		
IN5		
IN6		
IN7	Opto Not Configured	
IN8		
IN9		
IN10		
IN11	Motemp	+5V PU

Input/Output

Digital Inputs | Digital Outputs

Name	Notes
OUT1	Isolated Fault Active Off
OUT2	Isolated Not Configured
OUT3	
OUT4	
OUT5	HS Not Configured
OUT 6	HS SPI_MOSI
OUT 7	HS SPI_CLK
OUT 8	HS SPI_EN1
OUT 9	Brake Active-HI

Filter Configuration

Filter Settings | Analog | V Loop | I Loop | Input Shaping

Name	Notes
Analog: Reference Filter	Disabled
Vloop: Input Filter	Disabled
Vloop: Output Filter 1	Low Pass, Butterworth, 2-pole, 200 Hz
Vloop: Output Filter 2	Disabled
Vloop: Output Filter 3	Disabled
Iloop: Input Filter 1	Disabled
Iloop: Input Filter 2	Disabled
Input Shaping	Disabled

Home

Option	Notes
Method	Set Current Position as Home

Fault Configuration

Latch Fault

Active	Notes
✓	Short Circuit
✓	Amp Over Temperature
✓	Motor Over Temp
	Over Voltage
	Under Voltage
✓	Feedback Error
	Motor Phasing Error
✓	Following Error
	Command Input Fault
	Motor Wiring Disconnected
	STO Active

OPTIONAL FAULTS

	Over Current (Latched)
--	------------------------

HIGH SPEED INPUTS: IN1, IN2, IN3, IN4, IN5, IN6

- Digital, non-isolated, high-speed
- 12V Compatible
- Programmable functions

SPECIFICATIONS


Input	Data	Notes
Input Voltages	HI	$VT+ \geq 2.5 \sim 3.5Vdc$
	LO	$VT- \leq 1.3 \sim 2.2 Vdc$
	Hys	$VH 0.7 \sim 1.5 Vdc$
	Max	+30 Vdc
	Min	0 Vdc
Pull-up	R1	10 k Ω
Low pass filter	R2	1 k Ω
	C1	100 pF
	RC ¹	0.1 μs

Notes:

- 1) The $R2 \cdot C1$ time constant applies when input is driven by active HI/LO devices

CONNECTIONS

Input	J4 Pins
IN1	18
IN2	17
IN3	20
IN4	19
IN5	22
IN6	21
Sgnd	3,4,15,16,23,50

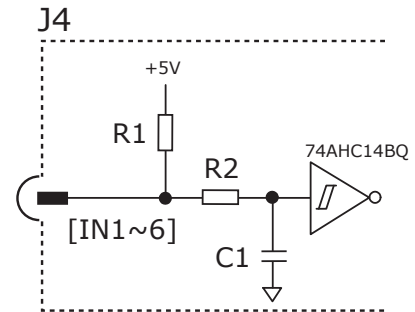

MOTOR OVERTEMP INPUT: IN11

- Digital, non-isolated
- Motor overtemp input
- 24V Compatible
- Programmable functions

MOTOR OVER TEMP INPUT

The 4.99k pull-up resistor works with PTC (positive temperature coefficient) thermistors that conform to BS 4999:Part 111:1987, or switches that open/close indicating a motor over-temperature condition. The active level is programmable.


SPECIFICATIONS

Input	Data	Notes
Input Voltages	HI	$VT+ \geq 2.5 \sim 3.5Vdc$
	LO	$VT- \leq 1.3 \sim 2.2 Vdc$
	Hys	$VH 0.7 \sim 1.5 Vdc$
	Max	+30 Vdc
	Min	0 Vdc
Pull-up	R1	4.99 k Ω
Low pass filter	R2	10 k Ω
	C1	33 nF
	RC ¹	330 μs

* RC time constant applies when input is driven by active high/low device

CONNECTIONS

Input	J2 Pins
IN11	17
Sgnd	8,18,21,22

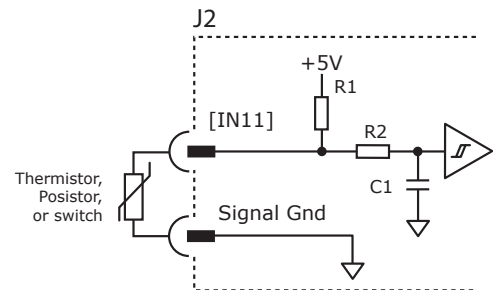

BS 4999:Part 111:1987

Property	ohms
Resistance in the temperature range 20°C to +70°C	60~750
Resistance at 85°C	≤ 1650
Resistance at 95°C	≥ 3990
Resistance at 105°C	≥ 12000


OPTO-ISOLATED INPUTS: IN7, IN8, IN9, IN10

- Digital, opto-isolated
- A group of four, with a common terminal
- Works with current sourcing or sinking drivers
- 24V Compatible
- Programmable functions

SPECIFICATIONS		
Input	Data	Notes
Input Voltages	HI	$V_{in} \geq \pm 10.0 \text{ Vdc} *$
	LO	$V_{in} \leq \pm 6.0 \text{ Vdc} *$
	Max	$\pm 30 \text{ Vdc} *$
Input Current	$\pm 24\text{V}$	$\pm 3.6 \text{ mAdc}$
	0V	0 mAdc

* Vdc Referenced to ICOM terminals.

CONNECTIONS	
Signal	J4 Pins
IN7	27
IN8	25
IN9	26
IN10	24
ICOM	28

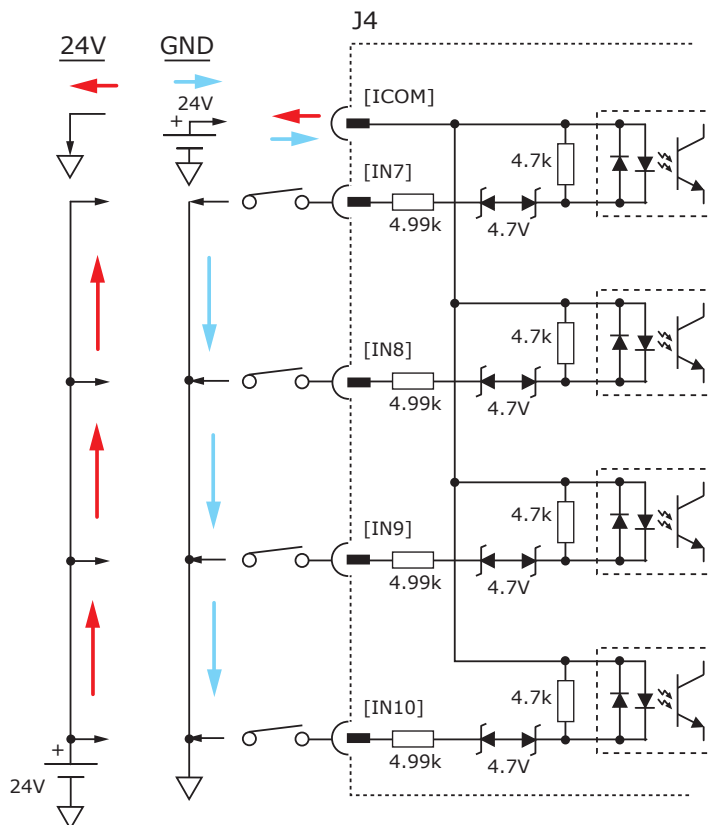

ANALOG INPUT: AIN1

- ± 10 Vdc, differential
- 12-bit resolution
- Programmable functions


As a reference input it takes position/velocity/torque commands from a controller. If not used as a command input, it can be used as general-purpose analog input.

SPECIFICATIONS

Spec	Data	Notes
Input Voltage	Vref	± 10 Vdc
Input Resistance	Rin	5 k Ω

CONNECTIONS

Signal	J4 Pins
AIN(+)	2
AIN(-)	1
Sgnd	3,4,15,16,23,50

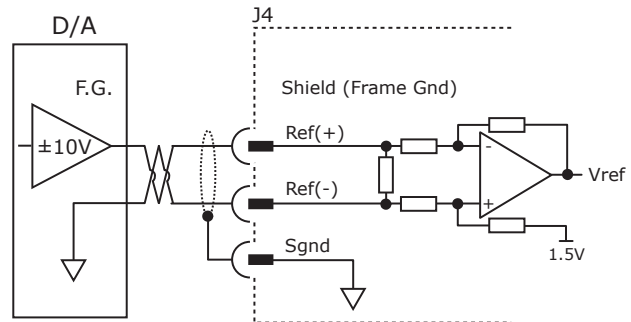

OPTO-ISOLATED OUTPUTS: OUT1, OUT2, OUT3, OUT4


- Digital, opto-isolated
- MOSFET output SSR, 2-terminal
- Flyback diode for inductive loads
- 24V Compatible
- Programmable functions

SPECIFICATIONS

Output	Data	Notes
ON Voltage OUT(+) - OUT(-)	Vdc	0.5V @ 300 mAdc
Output Current	Iout	300 mAdc max

CONNECTIONS: J4 PINS

Signal	(+)	(-)
OUT1	30	29
OUT2	32	31
OUT3	34	33
OUT4	36	35

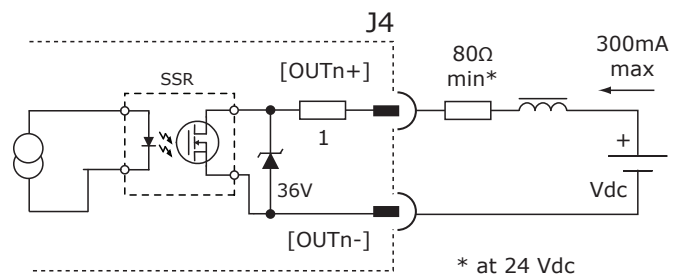

HI/LO DEFINITIONS: OUTPUTS

Input	State	Condition
OUT1~4	HI	Output SSR is ON, current flows
	LO	Output SSR is OFF, no current flows

HIGH-SPEED OUTPUT: OUT5, OUT6, OUT7, OUT8


- CMOS buffer
- 74AHCT1G125
- Programmable functions

SPECIFICATIONS

Output HI	Data	Notes
Vout HI	Voh	4.4 Vdc
Iout HI	Ioh	-8.0 mAdc
Vout LO	Vol	0.40 Vdc
Iout LO	Iol	8.0 mAdc

CONNECTIONS

Signal	J4 Pins
OUT 5	38
OUT 6	37
OUT 7	40
OUT 8	39
Sgnd	3,4,15,16,23,50

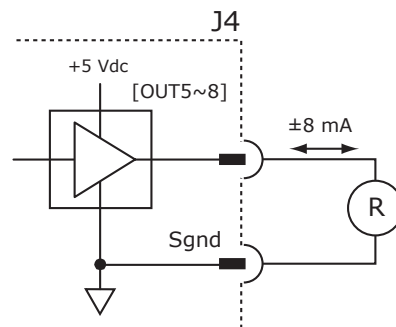

OPTO-ISOLATED MOTOR BRAKE OUTPUT: OUT9

- Brake output [OUT9]
- Opto-isolated
- 24V Compatible
- Programmable functions
- Gate output to drive external MOSFET

SPECIFICATIONS

Output	Data	Notes
Voltage Range	Max	+30 Vdc
Output Current	Ids	1.0 Adc

HI/LO DEFINITIONS: OUTPUTS

Input	State	Condition
BRAKE [OUT9]	HI	Output transistor is OFF Brake is un-powered and locks motor Motor cannot move Brake state is Active
	LO	Output transistor is ON Brake is powered, releasing motor Motor is free to move Brake state is NOT-Active

CME2 Default Setting for Brake Output [OUT9] is "Brake - Active HI"
Active = Brake is holding motor shaft (i.e. the *Brake is Active*)

Motor cannot move

No current flows in coil of brake

CME2 I/O Line States shows [OUT9] as HI

BRK Output voltage is HI (24V), MOSFET is OFF

Servo drive output current is zero

Servo drive is disabled, PWM outputs are off

Inactive = Brake is not holding motor shaft (i.e. the *Brake is Inactive*)

Motor can move


Current flows in coil of brake

CME2 I/O Line States shows [OUT9] as LO

BRK output voltage is LO (~0V), MOSFET is ON

Servo drive is enabled, PWM outputs are on

Servo drive output current is flowing

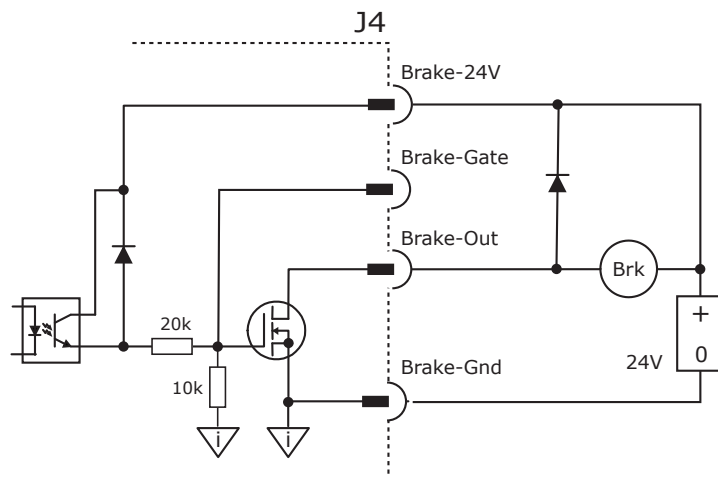

The brake circuits are optically isolated from all drive circuits and frame ground.

J4 CONNECTIONS

Pin	Signal
45	Brake-24V
48	Brake-Gate
47	Brake-Out
46	Brake Gnd

Argus R70

FEEDBACK CONNECTIONS

QUAD A/B ENCODER WITH FAULT PROTECTION

Encoders with differential line-driver outputs are required (single-ended encoders are not supported) and provide incremental position feedback via the A/B signals and the optional index signal (X) gives a once per revolution position mark. The MAX3097 receiver has differential inputs with fault protections for the following conditions:

Short-circuits line-line:

This produces a near-zero voltage between A & /A which is below the differential fault threshold.

Open-circuit condition:

Terminator resistors installed on user pc boards will pull the inputs together if either side (or both) is open. This will produce the same fault condition as a short-circuit across the inputs.

Low differential voltage detection:

This is possible with very long cable runs and a fault will occur if the differential input voltage is < 200mV.


±15kV ESD protection:

The 3097E has protection against high-voltage discharges using the Human Body Model.

Extended common-mode range:

A fault occurs if the input common-mode voltage is outside of the range of -10V to +13.2V

QUAD ENCODER WITH INDEX

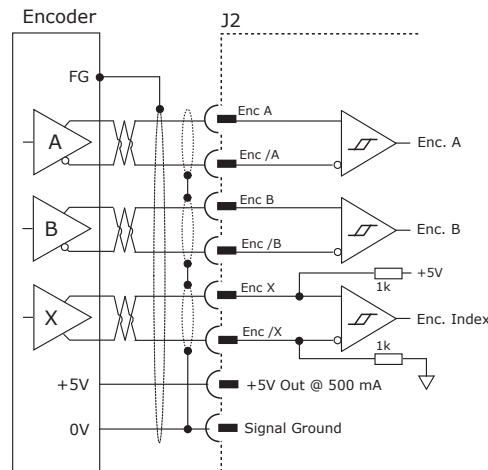


A/B/X SIGNALS

Signal	J2 Pins
Enc A	10
Enc /A	9
Enc B	12
Enc /B	11
Enc X	16
Enc /X	15
+5V	19,20
Sgnd	8,18,21,22

Sgnd = Signal Ground

ANALOG SIN/COS INCREMENTAL ENCODER

The Sin/Cos inputs are analog differential with 121 Ω terminating resistors and accept 1 Vp-p signals in the format used by incremental encoders with analog outputs, or with *ServoTube* motors. The index input is digital, differential.

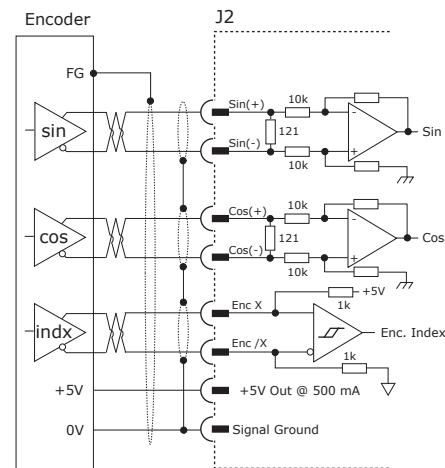


SIN/COS SIGNALS

Signal	J2 Pins
Sin(+)	2
Sin(-)	1
Cos(+)	4
Cos(-)	3
X	16
/X	15
+5V	19,20
Sgnd	8,18,21,22

Sgnd = Signal Ground
F.G. = Frame Gnd

RESOLVER

Connections to the resolver should be made with shielded cable that uses three twisted-pairs. Once connected, resolver set up, motor phasing, and other commissioning adjustments are made with CME 2 software. There are no hardware adjustments.

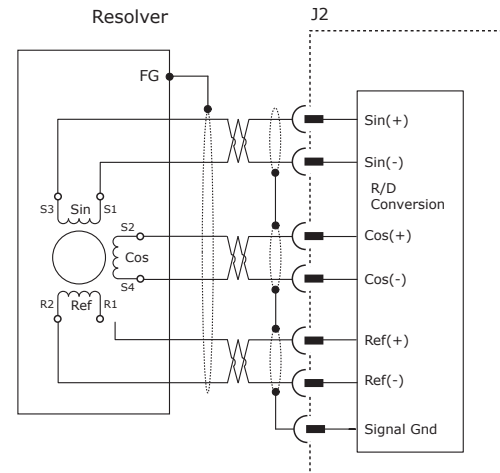


RESOLVER SIGNALS

Signal	J2 Pins
Sin(+)	2
Sin(-)	1
Cos(+)	4
Cos(-)	3
Ref(+)	24
Ref(-)	23
Sgnd	8,18,21,22

FEEDBACK CONNECTIONS

SSI ABSOLUTE ENCODER

The SSI (Synchronous Serial Interface) is an interface used to connect an absolute position encoder to a motion controller or control system. The R70 drive provides a train of clock signals in differential format to the encoder which initiates the transmission of the position data on the subsequent clock pulses. The polling of the encoder data occurs at the current loop frequency (16 kHz). The number of encoder data bits and counts per motor revolution are programmable. The hardware bus consists of two signals: SCLK and SDATA. Data is sent in 8 bit bytes, LSB first. The SCLK signal is only active during transfers. Data is clocked out on the falling edge and clock in on the rising edge of the Master.

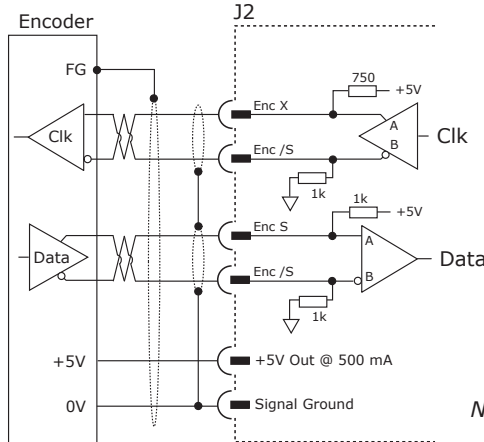

SSI, BiSS SIGNALS

SSI	BiSS	J2 Pins
Clk	MA+	14
/Clk	MA-	13
Data	SL+	12
/Data	SL-	11
+5V		19,20
Sgnd		8,18,21,22

*Note: Single (outer) shields should be connected at the controller end.
Inner shields should only be connected to Signal Ground on the drive.*

BiSS ABSOLUTE ENCODER

BiSS is an - Open Source - digital interface for sensors and actuators. BiSS refers to principles of well known industrial standards for Serial Synchronous Interfaces like SSI, AS-Interface® and Interbus® with additional options.

Serial Synchronous Data Communication

Cyclic at high speed

2 unidirectional lines Clock and Data

Line delay compensation for high speed data transfer

Request for data generation at slaves


Safety capable: CRC, Errors, Warnings

Bus capability incl. actuators

Bidirectional


BiSS B-protocol: Mode choice at each cycle start

BiSS C-protocol: Continuous mode

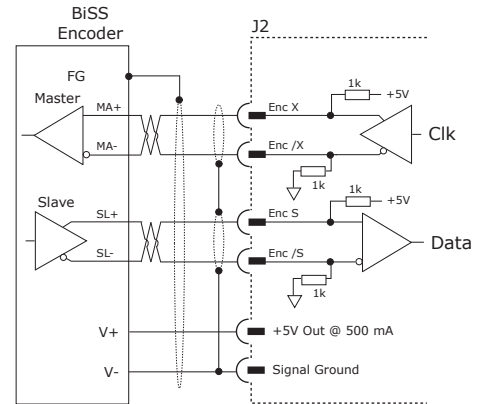

ENDAT ABSOLUTE ENCODER

The EnDat interface is a Heidenhain interface that is similar to SSI in the use of clock and data signals, but which also supports analog Sin/Cos channels from the same encoder. The number of position data bits is programmable as is the use of Sin/Cos channels. Use of Sin/Cos incremental signals is optional in the EnDat specification.

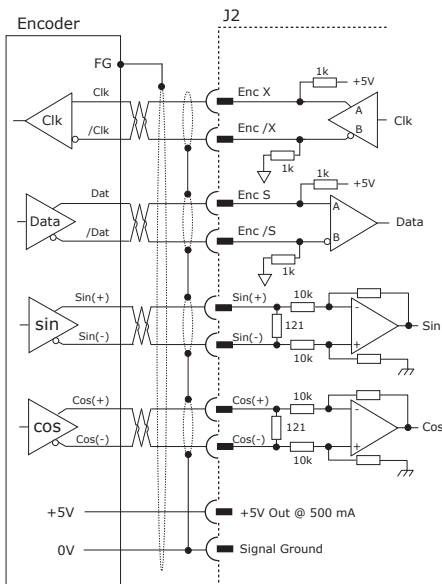


ENDAT SIGNALS

Signal	J2 Pins
Clk	16
/Clk	15
Data	14
/Data	13
Sin(+)	2
Sin(-)	1
Cos(+)	4
Cos(-)	3
+5V	19,20
Sgnd	8,18,21,22

Sgnd = Signal Ground

ABSOLUTE-A ENCODER

The Absolute A interface is a serial, half-duplex type that is electrically the same as RS-485. Note the battery which must be connected. Without it, the encoder will produce a fault condition.

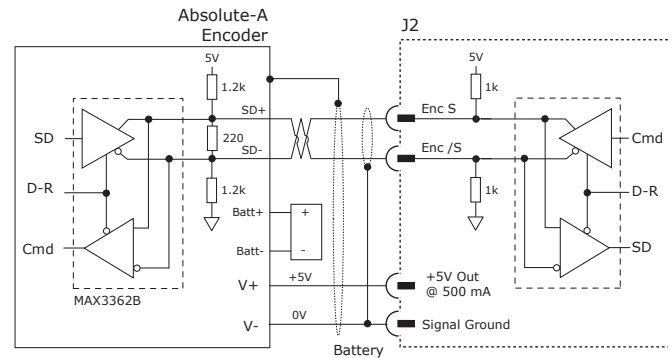

- Absolute A
- Tamagawa Absolute A
- Panasonic Absolute A Format
- Sanyo Denki Absolute A

ABSOLUTE-A SIGNALS

Signal	J2 Pins
Data	14
/Data	13
+5V	19,20
Sgnd	8,18,21,22

Sgnd = Signal Ground


MOTOR CONNECTIONS

MOTOR PHASE CONNECTIONS

The drive output is a three-phase PWM inverter that converts the DC buss voltage (+HV) into three sinusoidal voltage waveforms that drive the motor phase-coils. Cable should be sized for the continuous current rating of the motor. Motor cabling should use twisted, shielded conductors for CE compliance, and to minimize PWM noise coupling into other circuits. The motor cable shield should connect to motor frame ground for best results.

MOTOR SIGNALS

Signal	J1 Pin
Mot U	41~46
Mot V	31~36
Mot W	21~26

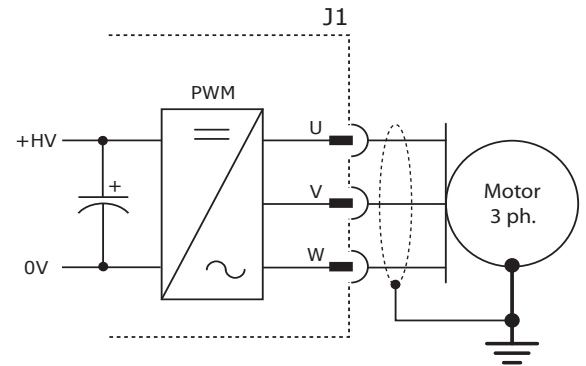


DIGITAL HALL SIGNALS

Hall signals are single-ended signals that provide absolute feedback within one electrical cycle of the motor. There are three of them (U, V, & W) and they may be sourced by magnetic sensors in the motor, or by encoders that have Hall tracks as part of the encoder disc. They typically operate at much lower frequencies than the motor encoder signals, and are used for commutation-initialization after startup, and for checking the motor phasing after the amplifier has switched to sinusoidal commutation.


HALL SIGNALS

Signal	J2 Pins
Hall U	5
Hall V	6
Hall W	7
+5V	19,20
Sgnd	8,18,21,22

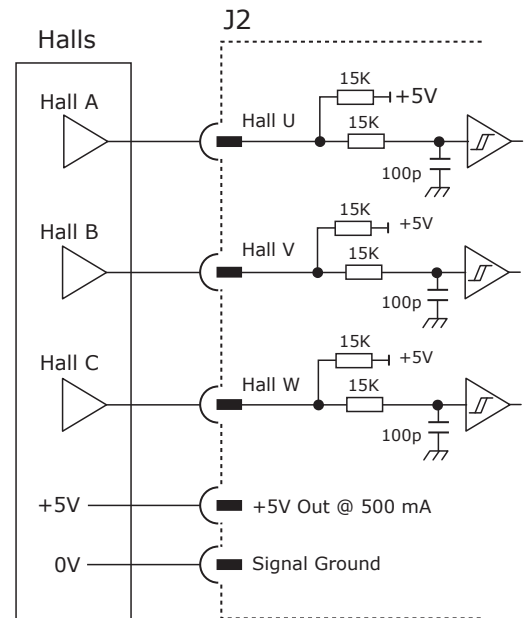


CONNECTORS & SIGNALS

CONNECTIONS FOR ABSOLUTE ENCODER WITH DUPLEX CLOCK/DATA

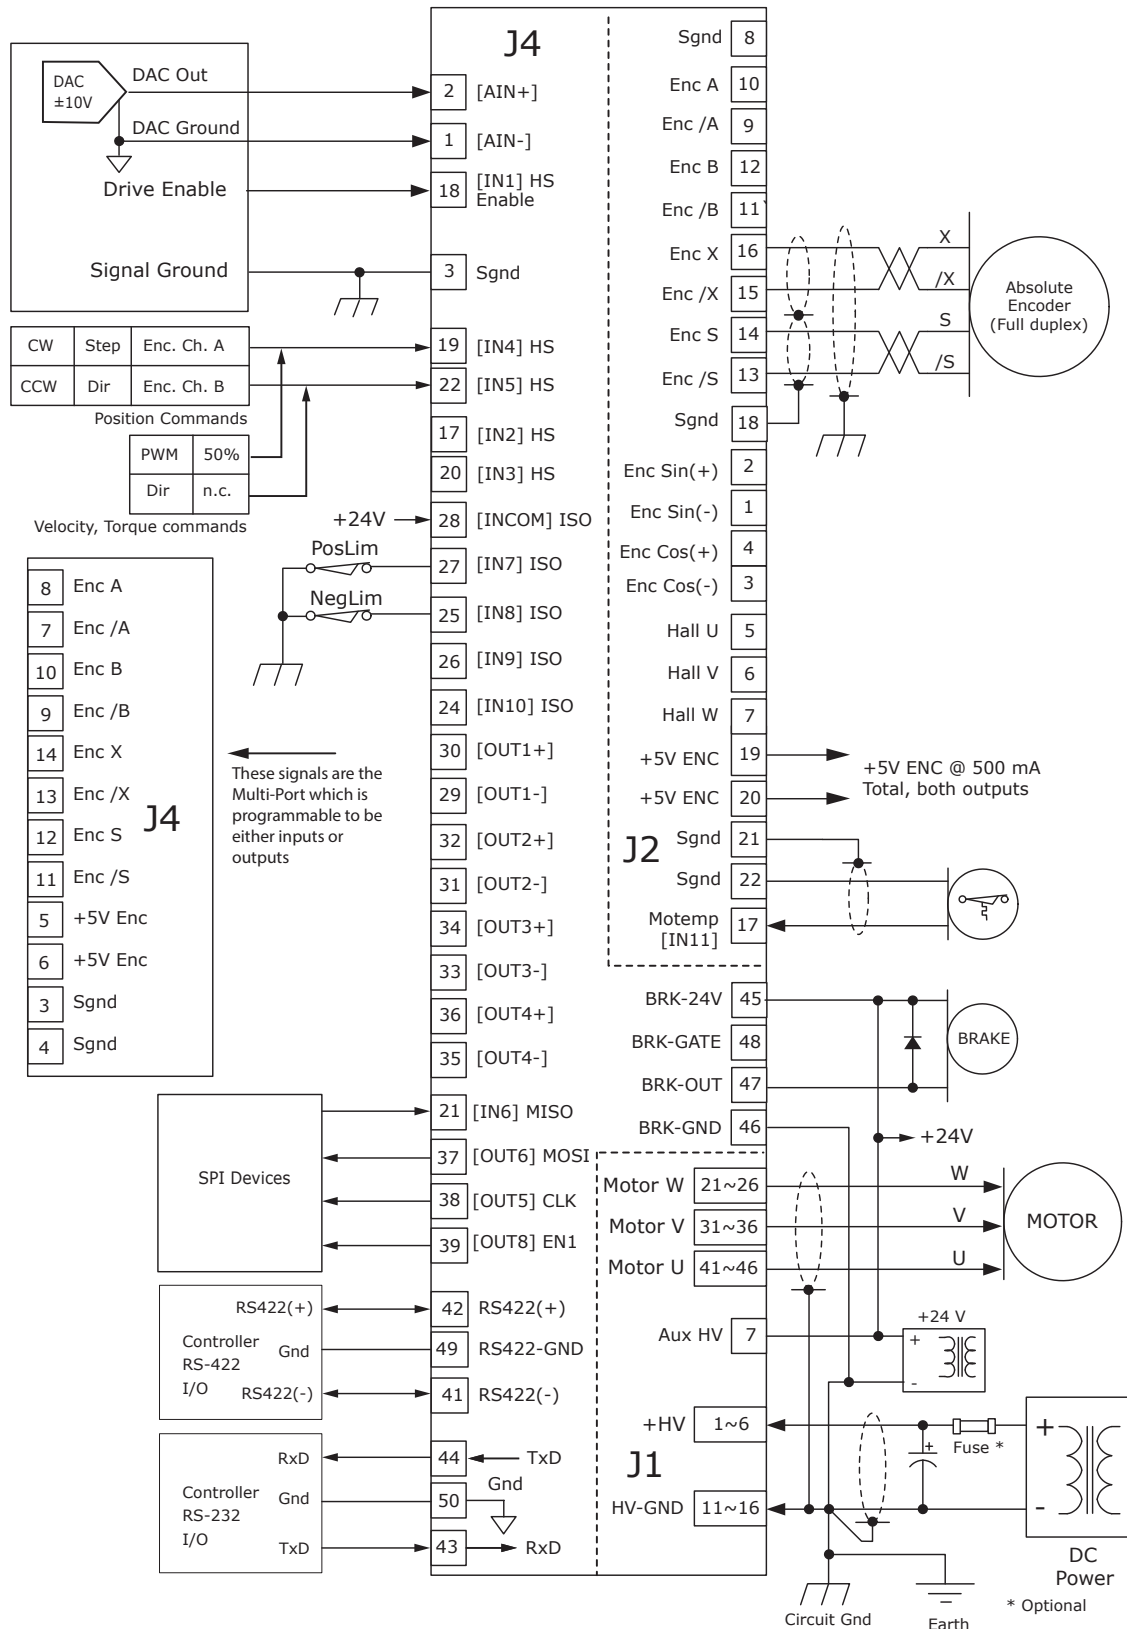


CONNECTORS & SIGNALS

CONNECTIONS FOR INCREMENTAL DIGITAL OR ANALOG ENCODERS

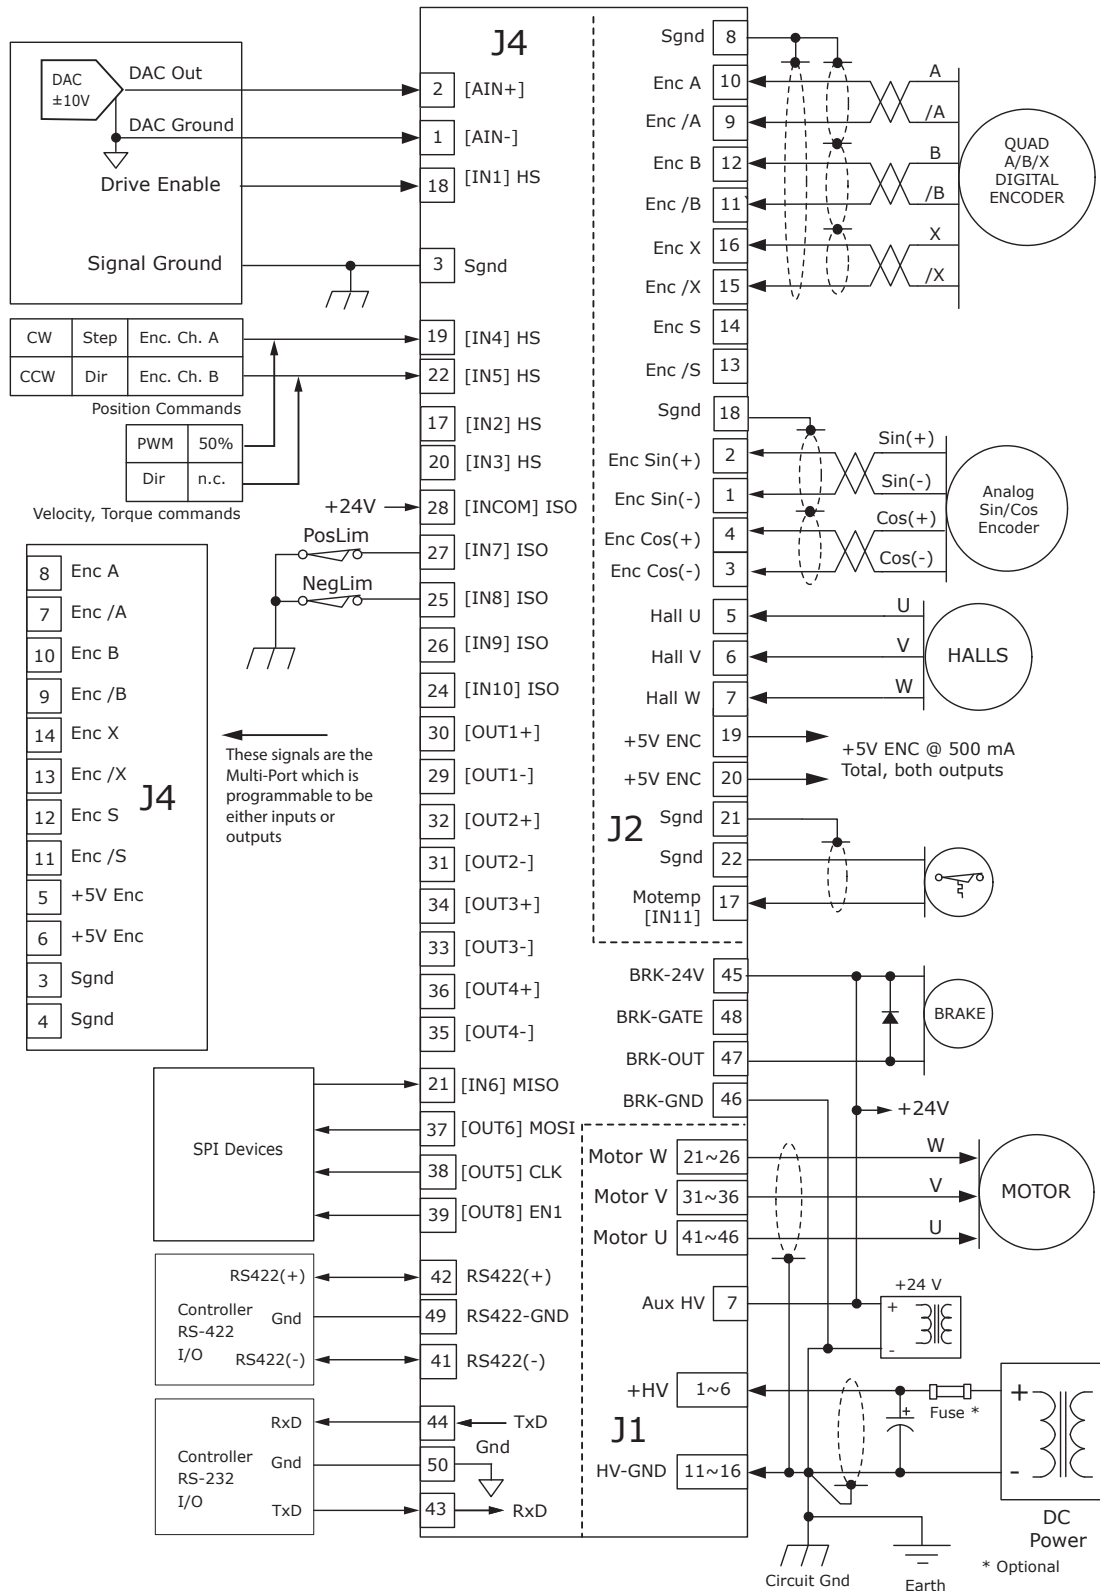

CONNECTORS & SIGNALS

CONNECTIONS FOR RESOLVERS (-R OPTION)

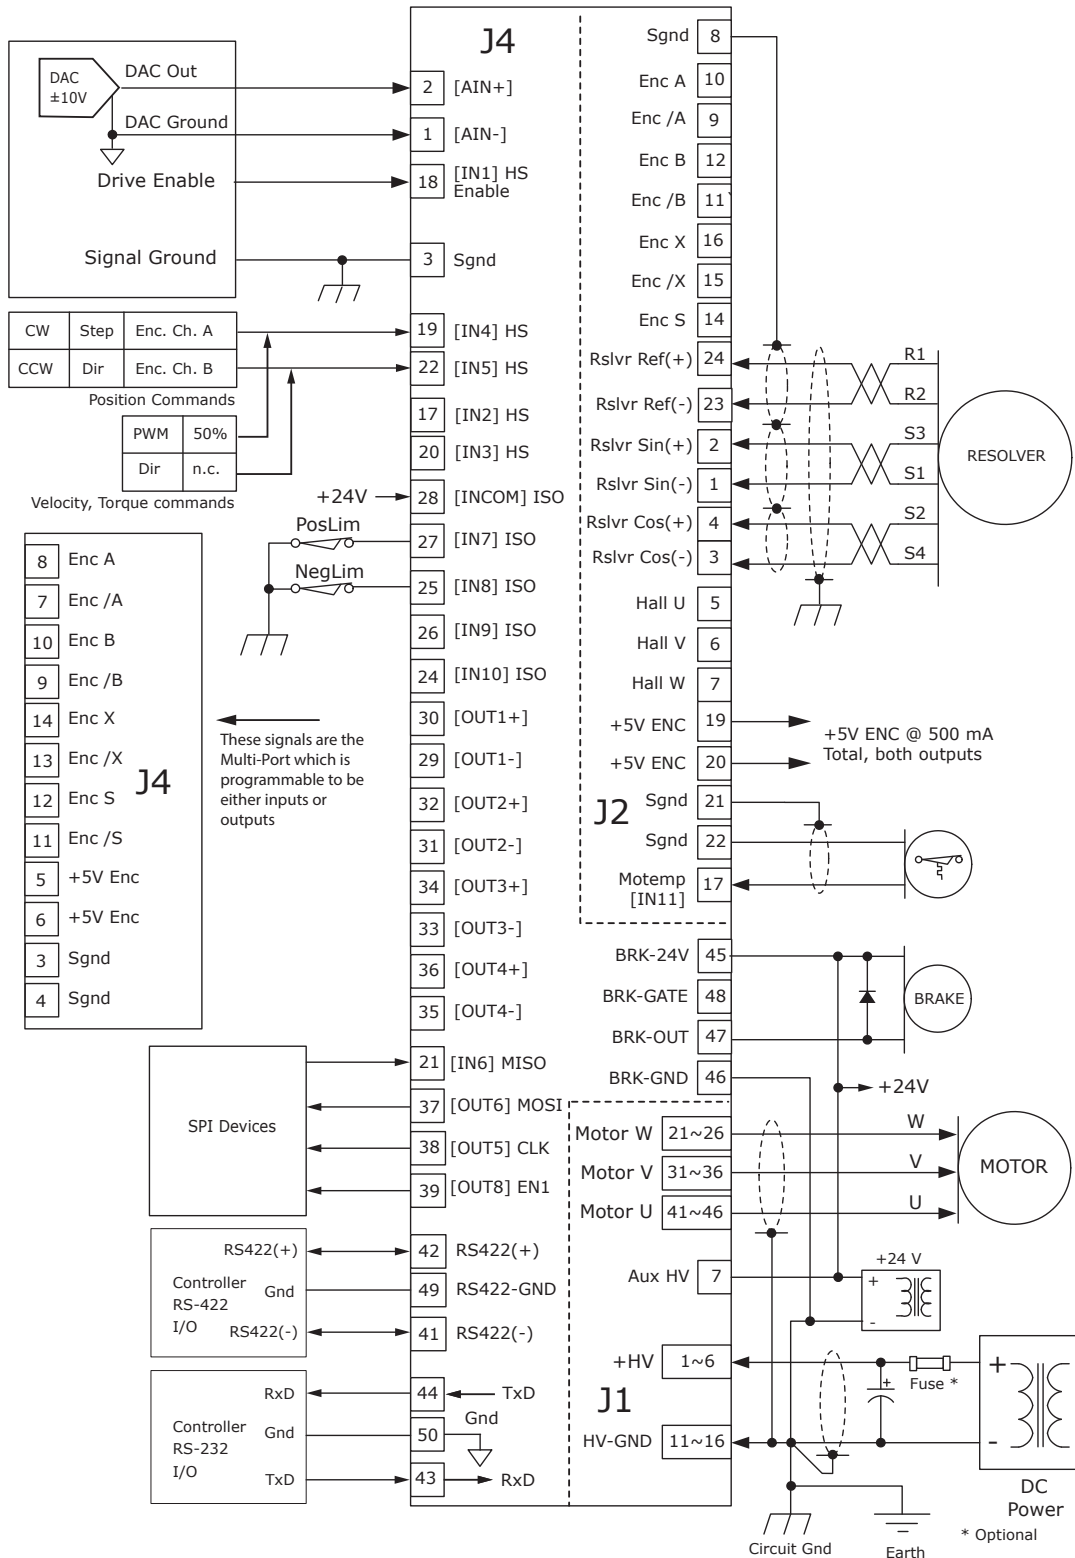


CONNECTORS & SIGNALS

J1 POWER & MOTOR

Signal	Pin	Signal
+HV	2	1
	4	3
	6	5
N/C	8	7
	10	9
HV Gnd	12	11
	14	13
	16	15
N/C	18	17
	20	19
Mot W	22	21
	24	23
	26	25
N/C	28	27
	30	29
Mot V	32	31
	34	33
	36	35
N/C	38	37
	40	39
Mot U	42	41
	44	43
	46	45

TOP VIEW

Viewed from above looking down on the connectors or PC board footprint to which the module is mounted

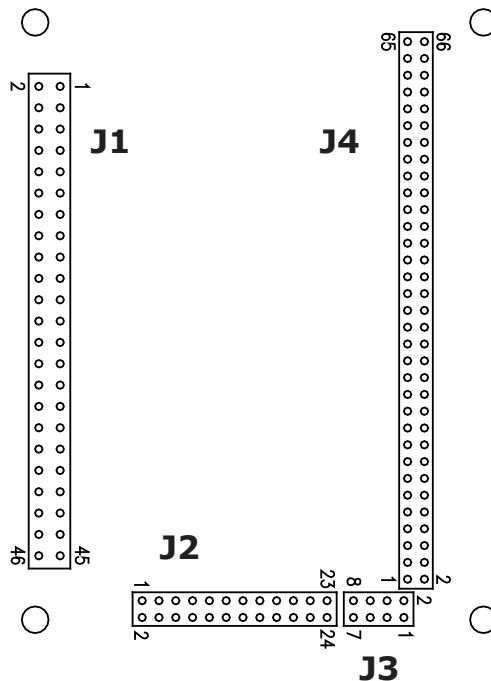

J1: HV & Motor
Dual row, 2 mm- centers
46 position female header
SAMTEC SSQ-123-01-L-D

J2: Feedback
Dual row, 2 mm- centers
24 position female header
SAMTEC SQT-112-01-L-D

J3: Safety
Dual row, 2 mm- centers
8 position female header
SAMTEC SQT-104-01-L-D

J4: Control
Dual row, 2 mm- centers
66 position female header
SAMTEC SQT-133-01-L-D

J2 FEEDBACK

Signal	Pin	Signal
RES-REF-	23	24
Sgnd	21	22
+5V ENC	19	20
[IN11]	17	18
ENC /X	15	16
ENC /S	13	14
ENC /B	11	12
ENC /A	9	10
HALL W	7	8
HALL U	5	6
COS-	3	4
SIN-	1	2

J4 CONTROL

Signal	Pin	Signal
CAN_GND	65	66
CAN_GND	63	64
CAN_H	61	62
CAN_L	59	60
CAN_GND	57	58
CAN_GND	55	56
CAN_GND	53	54
CAN_GND	51	52
RS422-GND	49	50
Brake-Out	47	48
Brake-24V	45	46
RS232 RxD	43	44
RS422(-)	41	42
HS [OUT8] SPI-EN1	39	40
HS [OUT6] SPI-MOSI	37	38
[OUT4-] ISO	35	36
[OUT3-] ISO	33	34
[OUT2-] ISO	31	32
[OUT1-] ISO	29	30
[IN7] ISO	27	28
[IN8] ISO	25	26
Sgnd	23	24
[IN6] HS SPI-MISO	21	22
[IN4] HS	19	20
[IN2] HS	17	18
Sgnd	15	16
Enc /X	13	14
Enc /S	11	12
Enc /B	9	10
Enc /A	7	8
+5V ENC	5	6
Sgnd	3	4
[AREF-]	1	2

J3 SAFETY


Signal	Pin	Signal
STO-GND	2	1
STO-OVR	4	3
STO-IN1-	6	5
STO-IN1+	8	7

PRINTED CIRCUIT BOARD FOOTPRINT

TOP VIEW

Viewed from above looking down on
the connectors or PC board footprint
to which the module is mounted

J1 Signal Grouping
for current-sharing
See Note 1

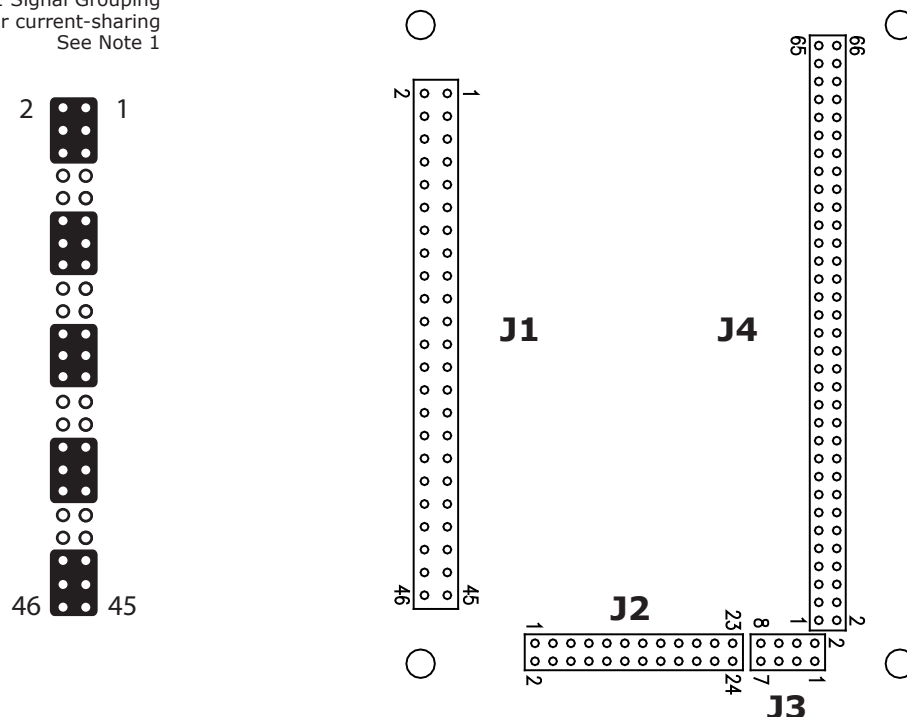

PCB Hardware:

Qty	Description	Mfgr	Part Number	Remarks
1	Socket Strip	Samtec	SSQ-123-01-L-D	J1 HV & Motor
1	Socket Strip	Samtec	SQT-112-01-L-D	J2 Feedback
1	Socket Strip	Samtec	SQT-104-01-L-D	J3 Safety
1	Socket Strip	Samtec	SQT-133-01-L-D	J4 Control
2	Standoff	PEM	KFE-4/40-8ET	#4/40 X 1/4"

Additional Hardware (not shown above)

2	Screw, #4-40 x 1.25" Phillips Pan Head External Tooth Lockwasher SEMS, Stainless, or steel with nickel plating, Torque to 3~5 lb-in (0.34~0.57 N·m)
---	---


Notes

1. J1 signals of the same name must be connected for current-sharing (see graphic above).
2. To determine copper width and thickness for J1 signals refer to specification IPC-2221. (Association Connecting Electronic Industries, <http://www.ipc.org>)
3. Standoffs or mounting screws should connect to etch on pc board that connect to frame ground for maximum noise suppression and immunity.

PRINTED CIRCUIT DRILLING DIMENSIONS

Notes:




1. This shows the drilling dimensions looking down on the mounting surface of the PC board.

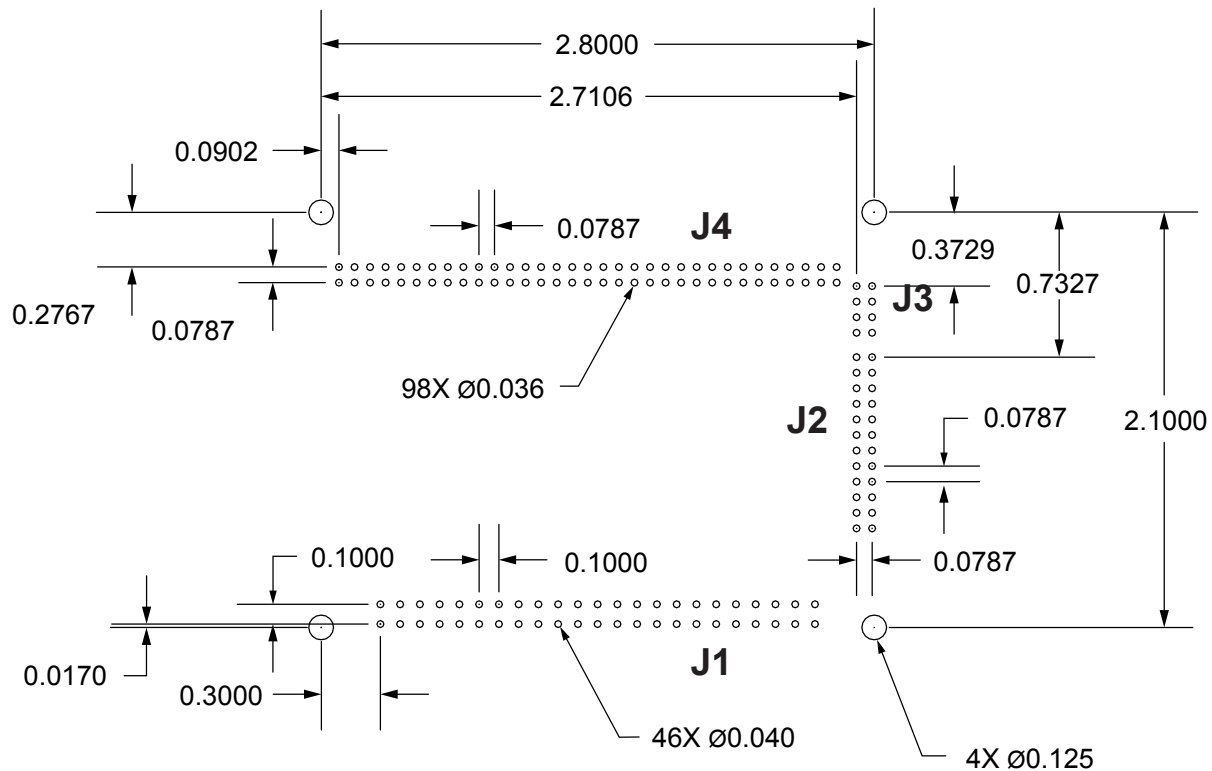

Dimensions are in inches

Argus R70

DIMENSIONS

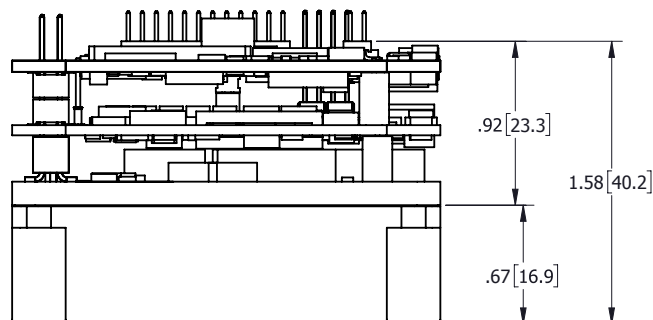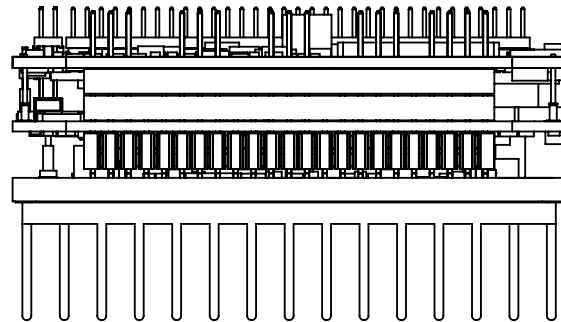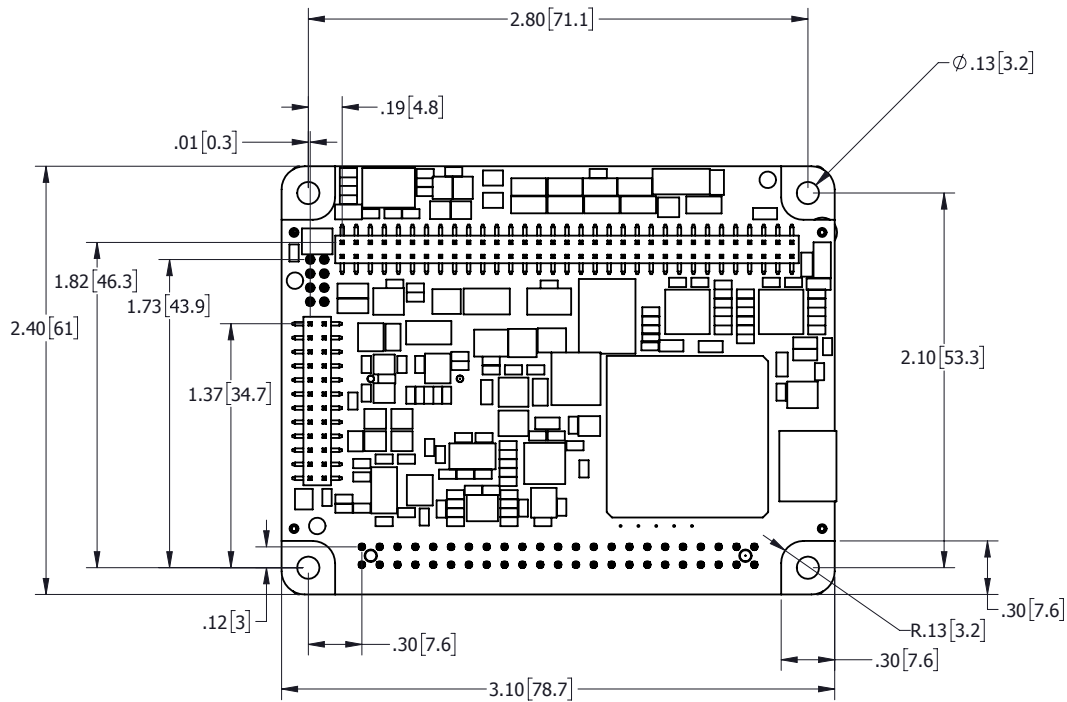


Dimensions are in inches[mm]

Argus R70


MOUNTING

MOUNTING WITH CONNECTORS ON PC BOARD

See page 22 for part numbers of connectors.

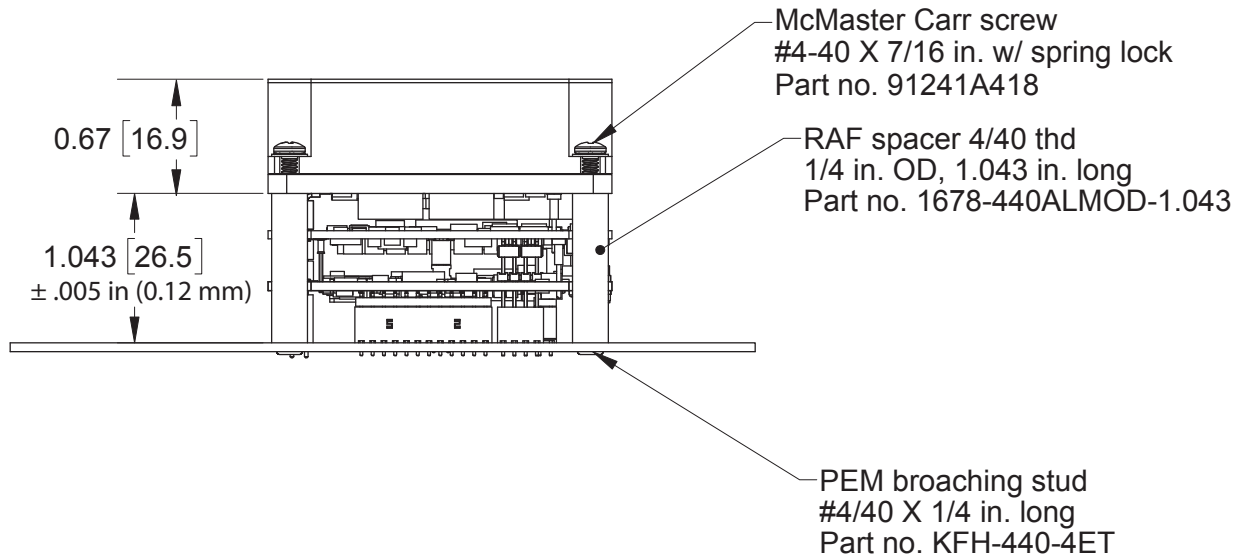

MOUNTING SOLDERED TO PC BOARD

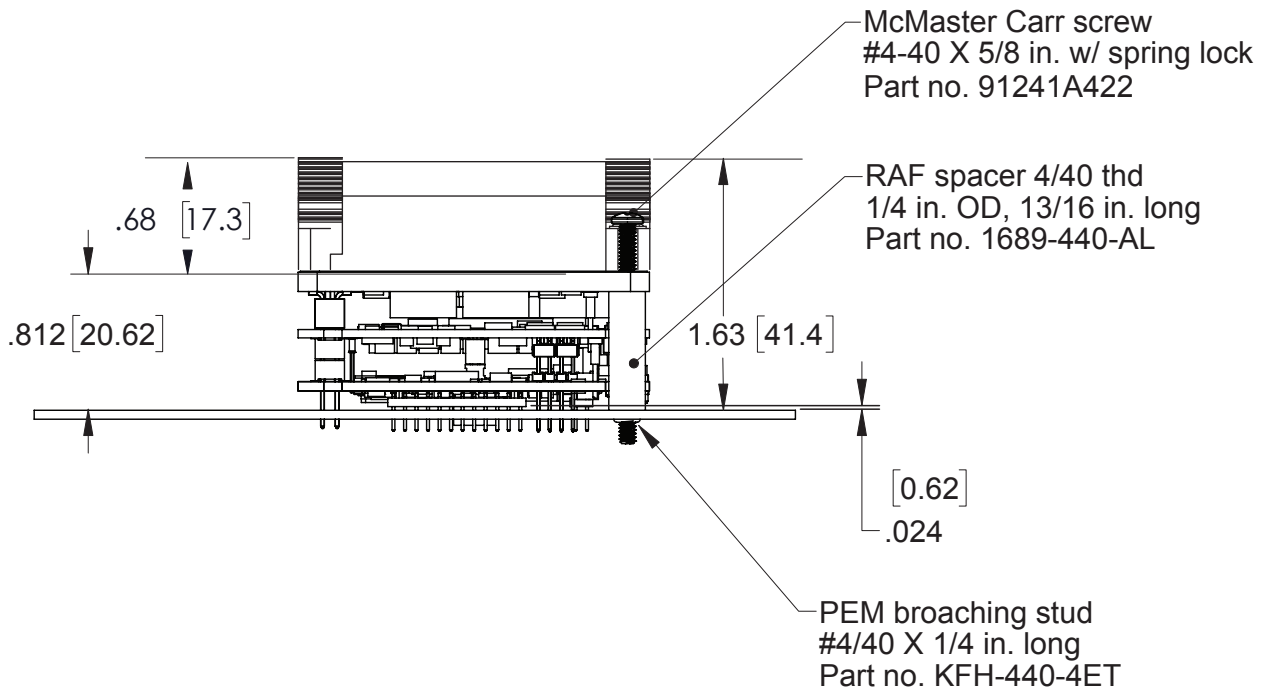


HEATSINK MOUNTING

HEATSINK INSTALLATION USING THE GEM-HK HEATSINK KIT

An AOS Micro Faze thermal pad is used in place of thermal grease. This material comes in sheet form and changes from solid to liquid form as the drive warms up. This forms an excellent thermal path from drive heatplate to heatsink for optimum heat transfer.

STEPS TO INSTALL

1. Insert the drive into the sockets and press smoothly until the heatplate is resting on the standoffs.
2. Remove one of the clear plastic carriers from the thermal pad.
3. Place the side of the thermal pad without the carrier onto the *Argus* aluminum heatplate taking care to center the thermal pad holes over the holes in the drive heatplate.
4. Remove the second clear plastic carrier from the thermal pad.
5. Place the heatsink onto the thermal pad. Take care to ensure that the holes in the heatsink, thermal pad, and drive all line up.
6. Insert the four #4-40 screws through the heatsink and torque them to 3~5 lb-in (0.34~0.57 N·m).
Apply a smaller torque to each screw in rotation until the final torque is reached.
This will ensure an even contact between the drive and heatplate for best thermal transfer.

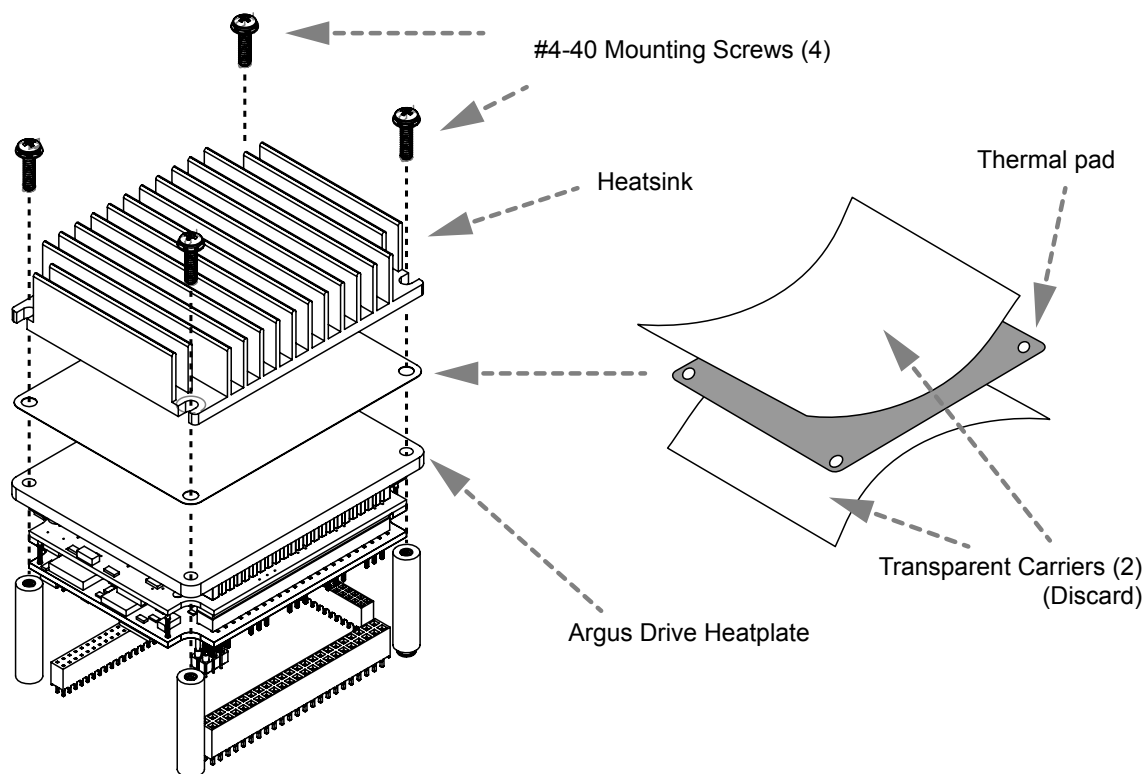


POWER DISSIPATION

The charts on this page show the internal power dissipation for different models under differing power supply and output current conditions. The values on the chart represent the continuous current that the drive would provide during operation. The +HV values are for the average DC voltage of the drive power supply. To see if a heatsink is required or not, the next step is to determine the temperature rise the drive will experience when it's installed. For example, if the ambient temperature in the drive enclosure is 40 °C, and the heatplate temperature is to be limited to 70° C or less to avoid shutdown, the maximum rise would be 70C - 40C. or 30° C. Dividing this dissipation by the thermal resistance of 9° C/W with no heatsink gives a dissipation of 3.33W. This line is shown in the charts. For power dissipation below this line, no heatsink is required. The vertical dashed line shows the continuous current rating for the drive model.


R70-055-60

Dissipation vs. Output Current & +HV

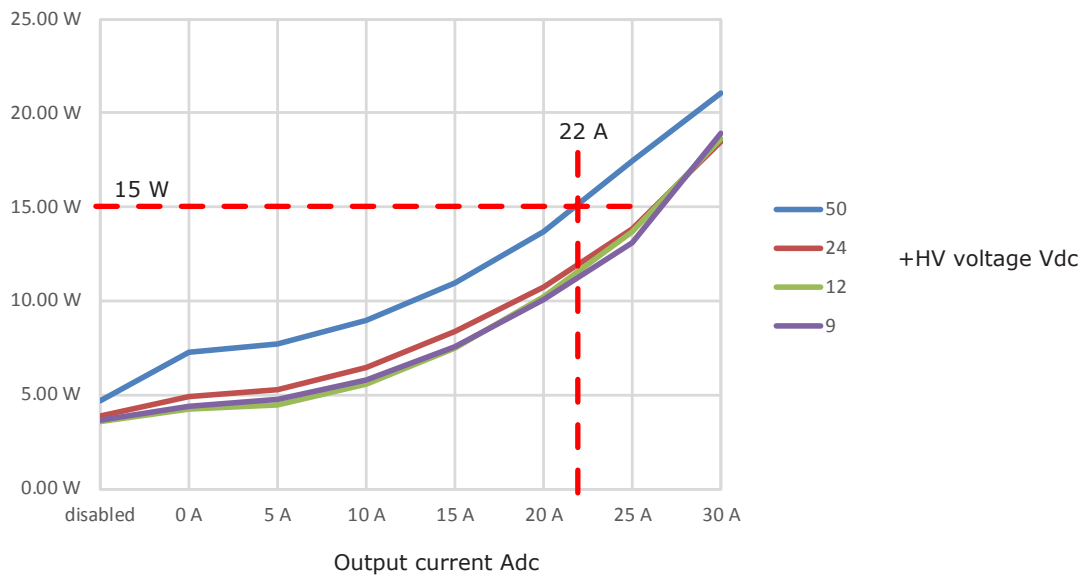

R70-090-60


Dissipation vs. Output Current & +HV

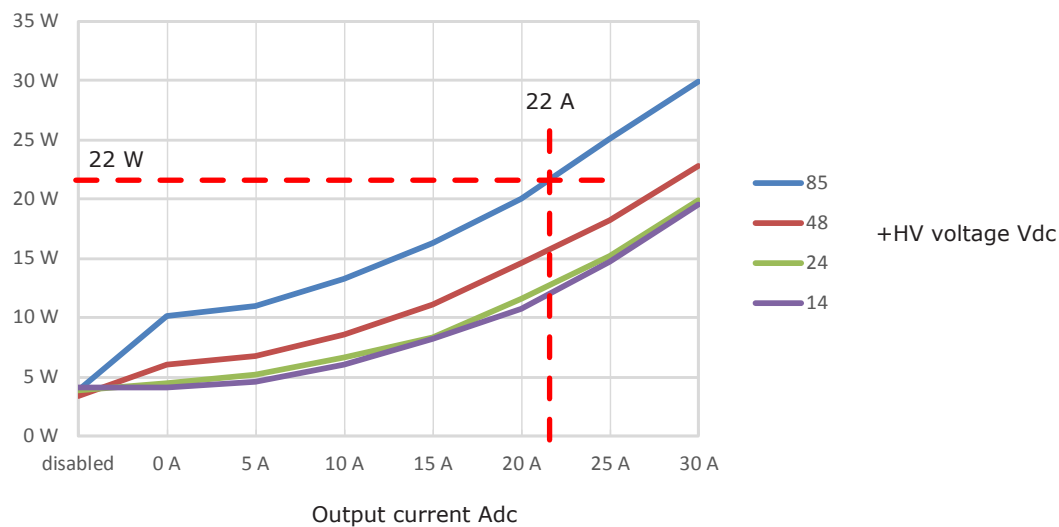

DEVELOPMENT KIT

DESCRIPTION


The Development Kit provides mounting and connectivity for one R70 drive. Solderless jumpers ease configuration of inputs and outputs to support their programmable functions. Switches can be jumpered to connect to digital inputs 1~10 so that these can be toggled to simulate equipment operation. Dual CANopen connectors make daisy-chain connections possible so that other CANopen devices such as Copley's Argus Plus or Xenus Plus CANopen drives can easily be connected.

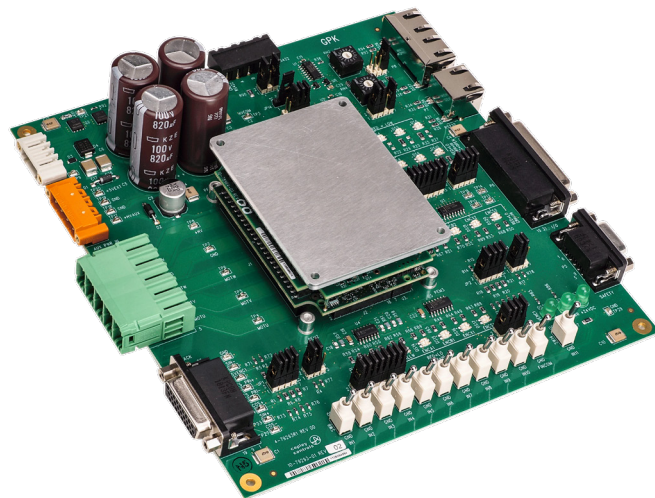

RS-232 CONNECTION

The RS-232 port is used to configure the drive for stand-alone applications, or for configuration before it is installed into an CANopen network. CME 2™ software communicates with the drive over this link and is then used for complete drive setup. The CANopen Device ID that is set by the rotary switch can be monitored, and a Device ID offset programmed as well.


The RS-232 connector, P7, is a modular RJ-11 type that uses a 6-position plug, four wires of which are used for RS-232. A connector kit is available (SER-CK) that includes the modular cable, and an adaptor to interface this cable with a 9-pin RS-232 port on a computer.



SER-CK SERIAL CABLE KIT

The SER-CK provides connectivity between a D-Sub 9 male connector and the RJ-11 connector P7 on the Development Kit. It includes an adapter that plugs into the COM1 (or other) port of a PC and uses common modular cable to connect to the R70.


The connections are shown in the diagram below.

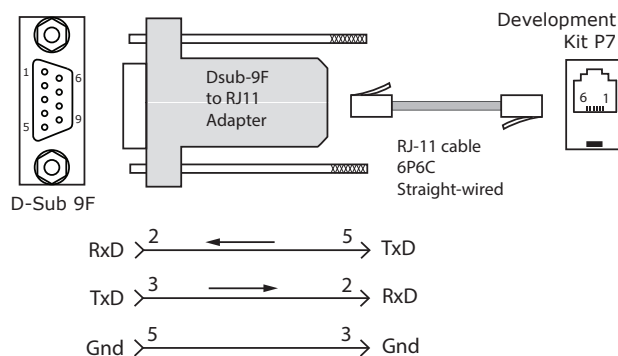

Don't forget to order a Serial Cable Kit SER-CK when placing your order for an R70 Development Kit!

RS-422 COMMUNICATIONS

RS-422 is a two-wire differential half-duplex port that operates from 9600 to 230.4 kbps. Connections to the RS-422 port are through P9. The graphic below shows the connections between a R70 and a computer RS-422 port.

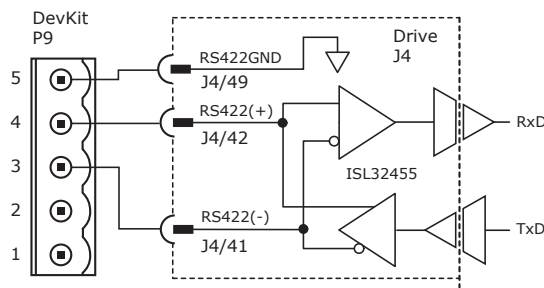


CANOPEN

CANOPEN CONNECTORS

Dual RJ-45 connectors that accept standard Ethernet cables are provided for CAN bus connectivity. Pins are wired-through so that drives can be daisy-chained and controlled with a single connection to the user's CAN interface. A CAN terminator should be placed in the last drive in the chain. The GPM-CV connector kit provides a D-Sub adapter that plugs into a CAN controller and has an RJ-45 socket that accepts the Ethernet cable.

GPM-CV CAN CONNECTOR KIT

The kit contains the GPM-CV adapter that converts the CAN interface D-Sub 9M connector to an RJ-45 Ethernet cable socket, plus a 10 ft (3 m) cable and terminator. Both connector pin-outs conform to the CiA DR-303-1 specification.

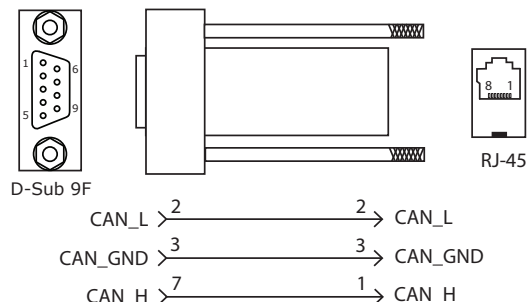

INDICATORS (LEDS)

The AMP LED on P7 shows the operational state of the R70. The STAT LED on P7 shows the state of the CANopen NMT (Network Management) state-machine in the drive. The ACT (Activity) LEDs on P8 show activity on the network. Details on the NMT state-machine can be found in the CANopen Programmers Manual on the Copley Controls web-site under Support > Manuals.

AMP LED

A single bi-color LED gives the state of the R70 by changing color, and either blinking or remaining solid.


The possible color and blink combinations are:

- *Green/Solid:* Drive OK and enabled. Will run in response to reference inputs or CANopen commands.
- *Green/Slow-Blinking:* Drive OK but NOT-enabled. Will change to *Green/Solid* when enabled.
- *Green/Fast-Blinking:* Positive or Negative limit switch active. Drive will only move in direction not inhibited by limit switch.
- *Red/Solid:* Transient fault condition. Drive will resume operation when fault is removed.
- *Red/Blinking:* Latching fault. Operation will not resume until drive is Reset.


Drive Fault conditions. Faults are programmable to be either transient or latching:

- Over or under-voltage
- Motor over-temperature
- Encoder +5 Vdc fault
- Short-circuits from output to ground
- Drive over-temperature
- Internal short circuits
- Short-circuits from output to output

P7 RS-32 SERIAL



P8 CAN CONNECTIONS



STAT LED

A single bi-color LED gives the state of the NMT state-machine by changing color, and either blinking or remaining solid. The possible color and blink combinations are:

GREEN (RUN)

- Off *Init*
- Blinking *Pre-operational*
- Single-flash *Stopped*
- On *Operational*

*Note: Red & green led on-times do not overlap.
LED color may be red, green, off, or flashing of either color.*

Green-Green-Red is actually a combination of single-flash Red (Warning Limit reached) and Blinking Green (Pre-Operational) When the green-red combination is seen, it appears as a single red!

RED (ERROR)

- Off *No error*
- Blinking *Invalid configuration, general configuration error*
- Single Flash *Warning limit reached*
- Double Flash *Error Control Event (guard or heartbeat event) has occurred*
- Triple Flash *Sync message not received within the configured period*
- On *Bus Off, the CAN master is bus off*

ACTIVITY LEDES


- Flashing RED indicates a network error, the R70 is trying to send data via the CAN port and getting no reply
- Flashing GREEN indicates the R70 is sending/receiving data via the CAN port

Argus R70

CAN CONNECTORS

CANOPEN CONNECTORS

Dual RJ-45 connectors that accept standard Ethernet cables are provided for CAN bus connectivity. Pins are wired-through so that drives can be daisy-chained and controlled with a single connection to the user's CAN interface. A CAN terminator should be placed in the last drive in the chain. The GPM-CV connector kit provides a D-Sub adapter that plugs into a CAN controller and has an RJ-45 socket that accepts the Ethernet cable.

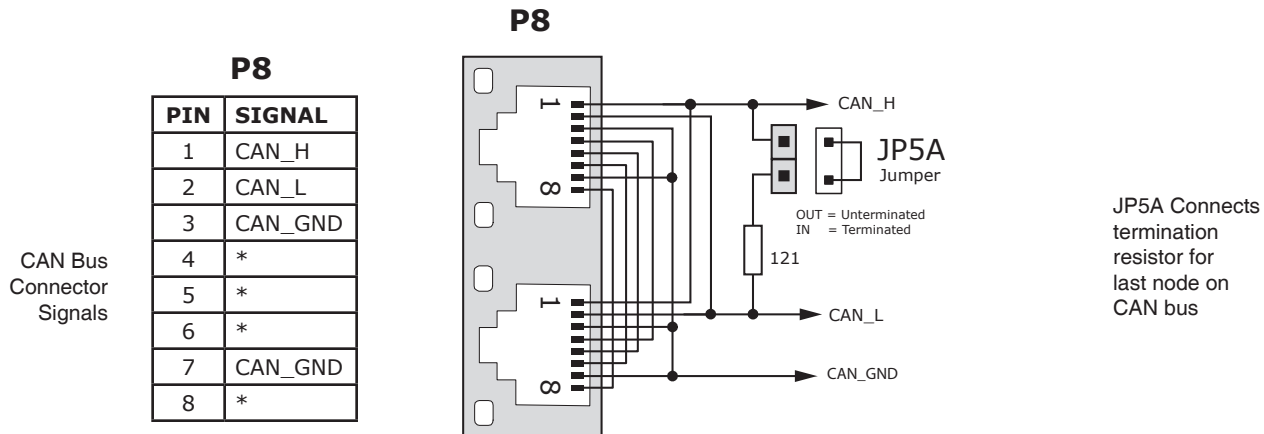

* These pins connect both sockets in the CAN connector.


Important!

Install JP5A ONLY if development kit is the LAST node on a CAN bus

SAFE TORQUE OFF (STO)

DESCRIPTION

If the STO feature will not be used, the STO function can be disabled by adding jumpers to a connector for P5 as shown below.

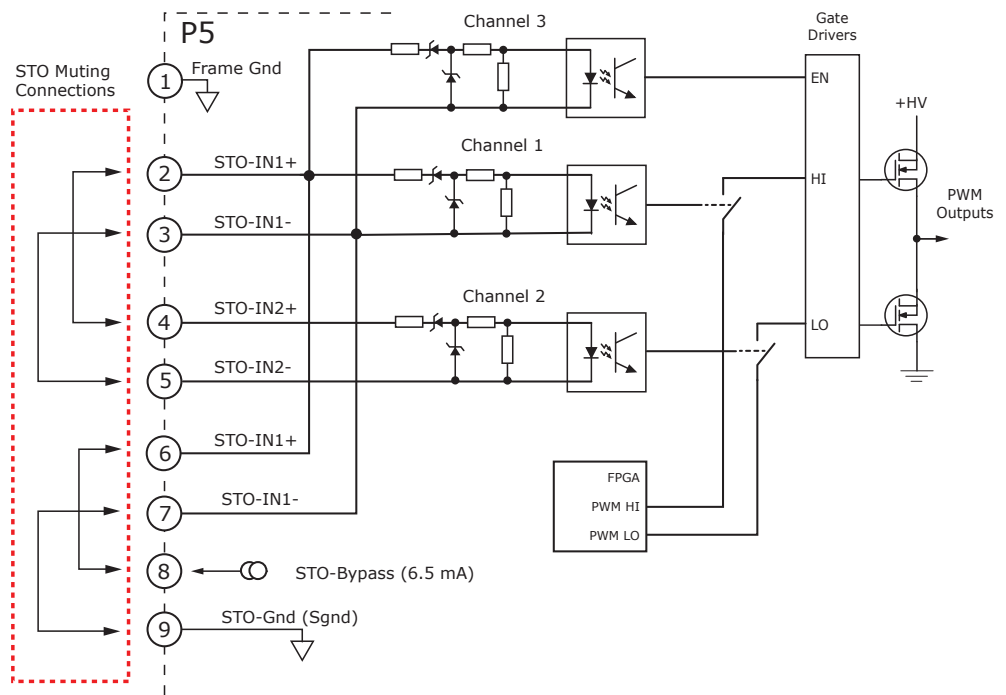

Argus R70

CANOPEN DEVICE ID SWITCHES


CANOPEN DEVICE ID SWITCH CONNECTIONS

The graphic below shows the connections to the CANopen Device ID switches. These are read after the drive is reset, or powered-on. When changing the settings of the switches, be sure to either reset the drive, or to power it off-on. Outputs [OUT6,7,8] and input [IN6] operate as an SLI (Switch & LED Interface) port which reads the settings on the CANopen Device ID switches, and controls the LEDs on the serial and CAN port connectors. In addition to the SLI function, the port can operate as an SPI interface.

The jumpers marked with red "X" should be removed so that SW13, or external connections to the signals do not interfere with the operation of the SLI port. The "X" on [OUT6] shows that no connections should be made to this by the user when the SLI port is active.


CME2 -> Input/Output -> Digital Outputs

☒ Use Switch and LED Interface (SLI)

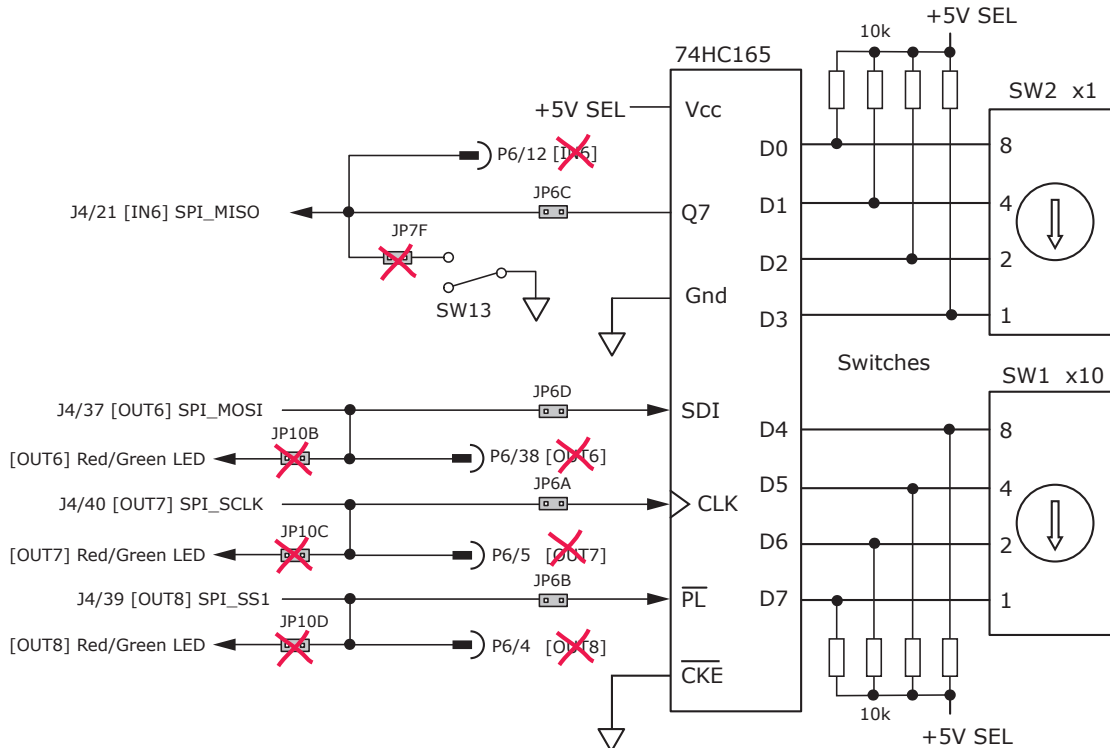

5V POWER SOURCES

Power for circuits on the Development Kit (+5V) can be supplied either from the servo drive (INT), or from an external +5V power supply (EXT). Jumper JP14 selects the source of the +5V from either the drive or from the external source.

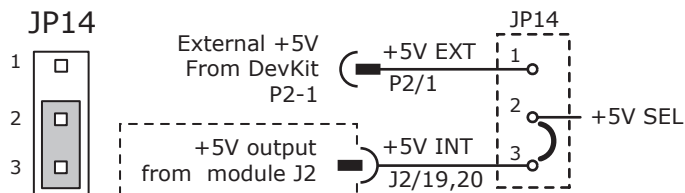

Argus R70


CONNECTORS & SIGNALS

LOGIC INPUTS & SWITCHES

The Development Kit has jumpers that can connect the R70 digital inputs to switches on the kit, or to the Signal connector 6.


As delivered, all of these jumpers are installed as shown. If connecting to external devices that actively control the level of an input, it is desirable to disconnect the switch which could short the input to ground.

For example, if [IN1] is connected to an external device for the Enable function, then jumper JP7A should be removed to take the switch SW1 out of the circuit. The figure below shows these connections.

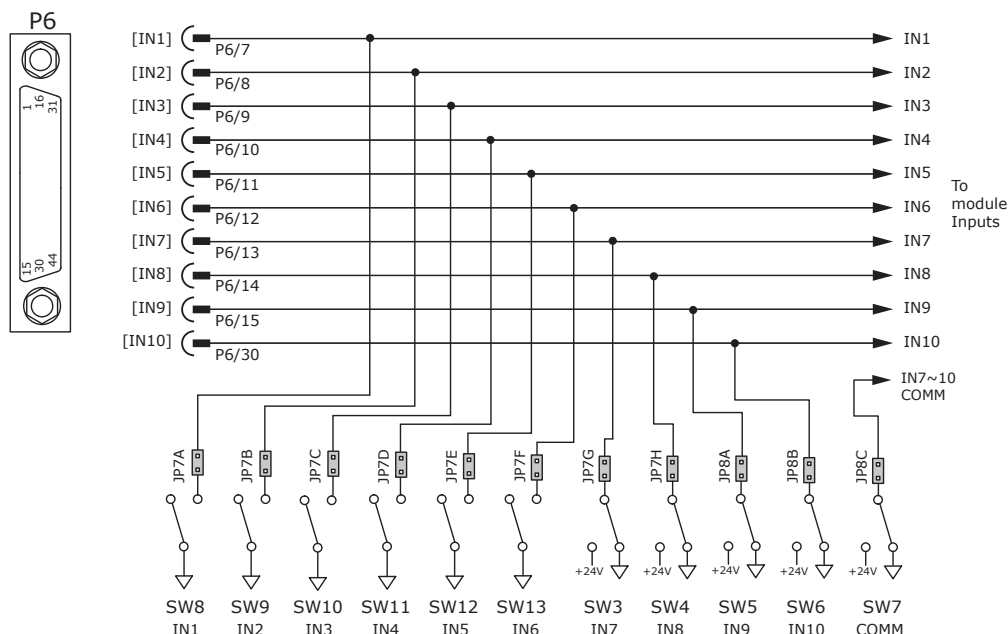

LOGIC OUTPUTS

There are logic outputs that can drive controller logic inputs or relays. If relays are driven, then flyback diodes must be connected across their terminals to clamp overvoltages that occur when the inductance of the relay coil is suddenly turned off. Outputs 5,6,7 & 8 are CMOS types that pull up to 5V or down to ground. When these outputs go high it turns on the green LED. When they are low, the red LED is turned on. Outputs 1,2,3, & 4 are two-terminal opto-isolated types. With the jumpers in place as shown, when the outputs are ON they will drive current through the LEDs DS3~6.

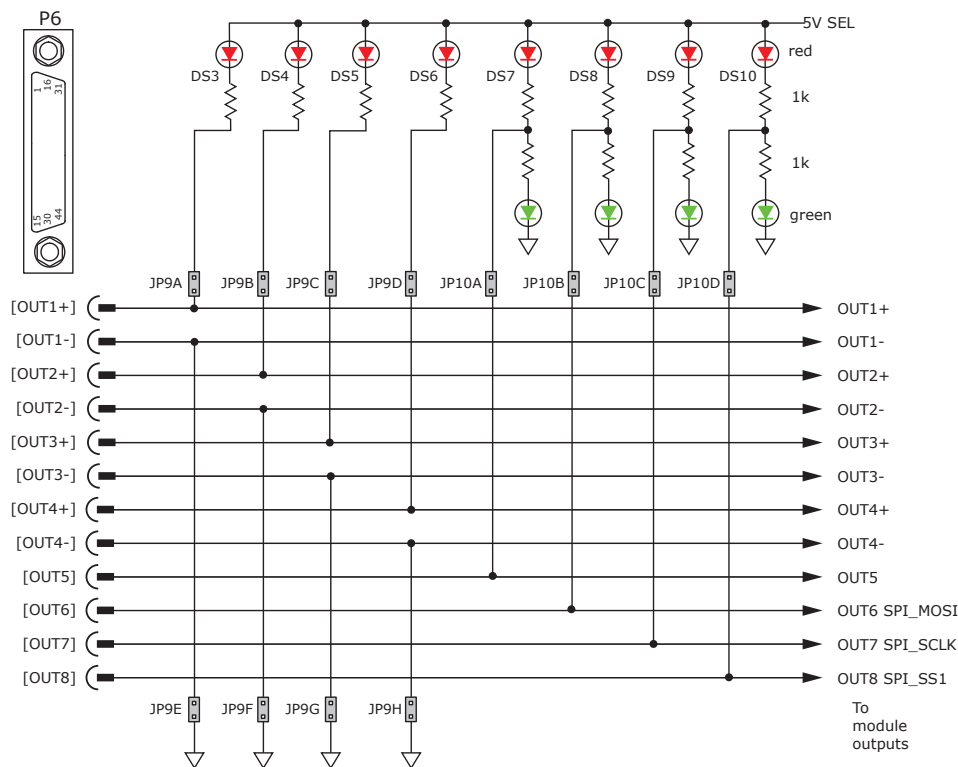

FEEDBACK CONNECTOR & SIGNALS

MOTOR FEEDBACK CONNECTOR P4

For motors with differential encoders: install jumpers JP1B, JP1C, JP1A to connect terminators across A, B, and X inputs.

For motors with single-ended encoders: remove jumpers JP1B, JP1C, JP1A to disconnect the terminators.


Then use the A, B, and X inputs for the encoder. The /A, /B, and /X inputs are then biased by dividers to work with the single-ended encoder signals.

A motor temperature sensor that connects to [IN11] must have jumper JP8D removed to prevent switch SW14 from grounding the Motemp[IN11] signal.


Absolute encoders such as the Nikon A type that use 2-wire bidirectional signals require biasing the lines when they are in a quiescent state.

Jumpers JP11A, JP11B, and JP1D must be in place to provide line termination and biasing.

LED's are provided to show the status of the encoder and Hall signals.

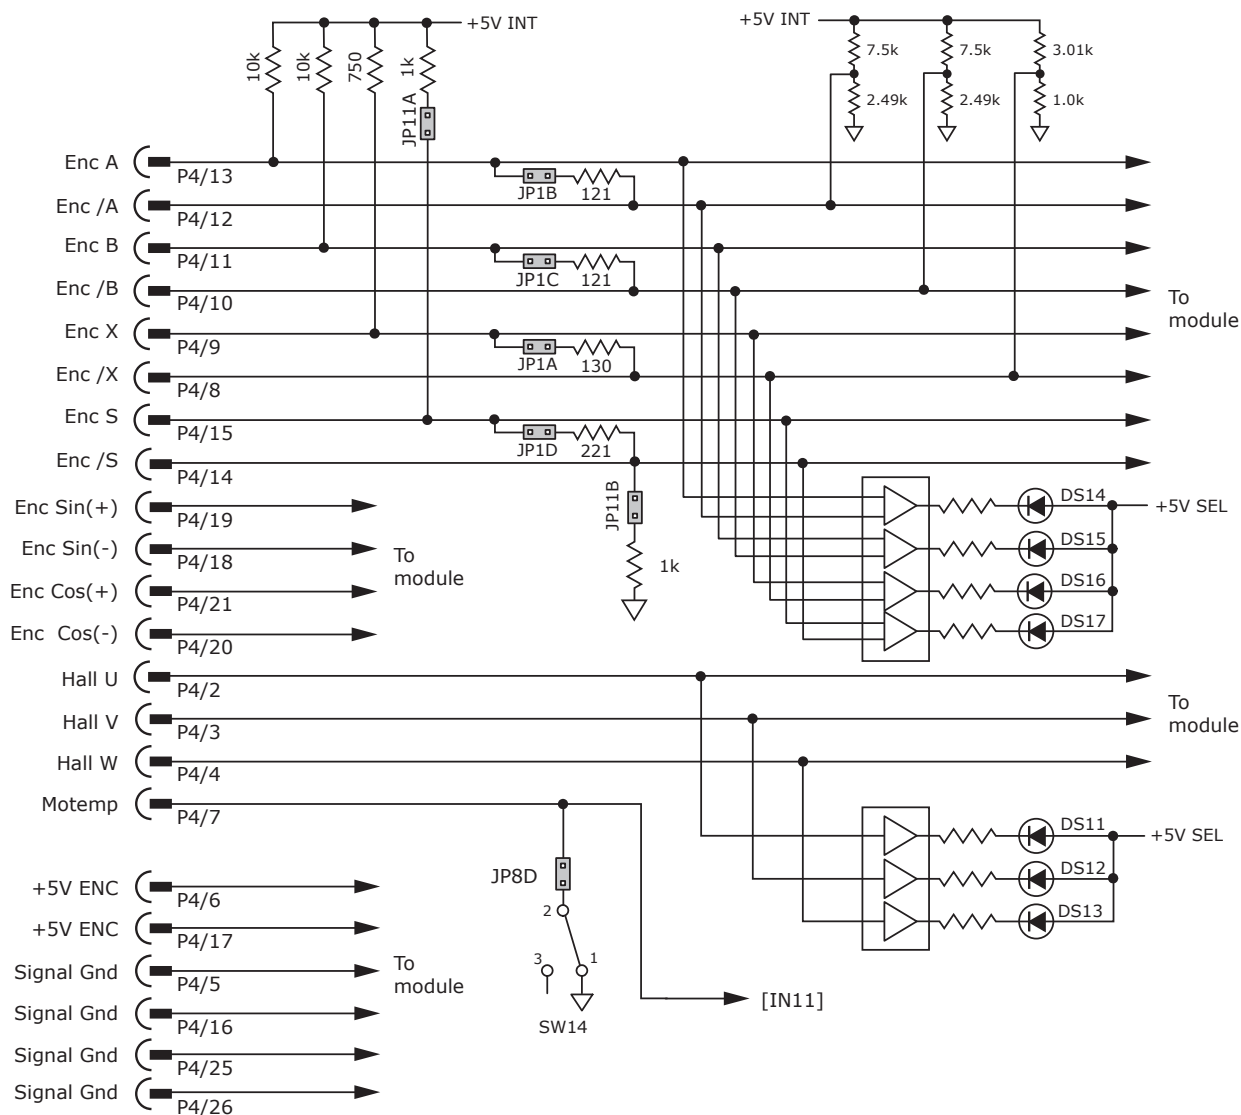

DEVELOPMENT KIT CONNECTIONS

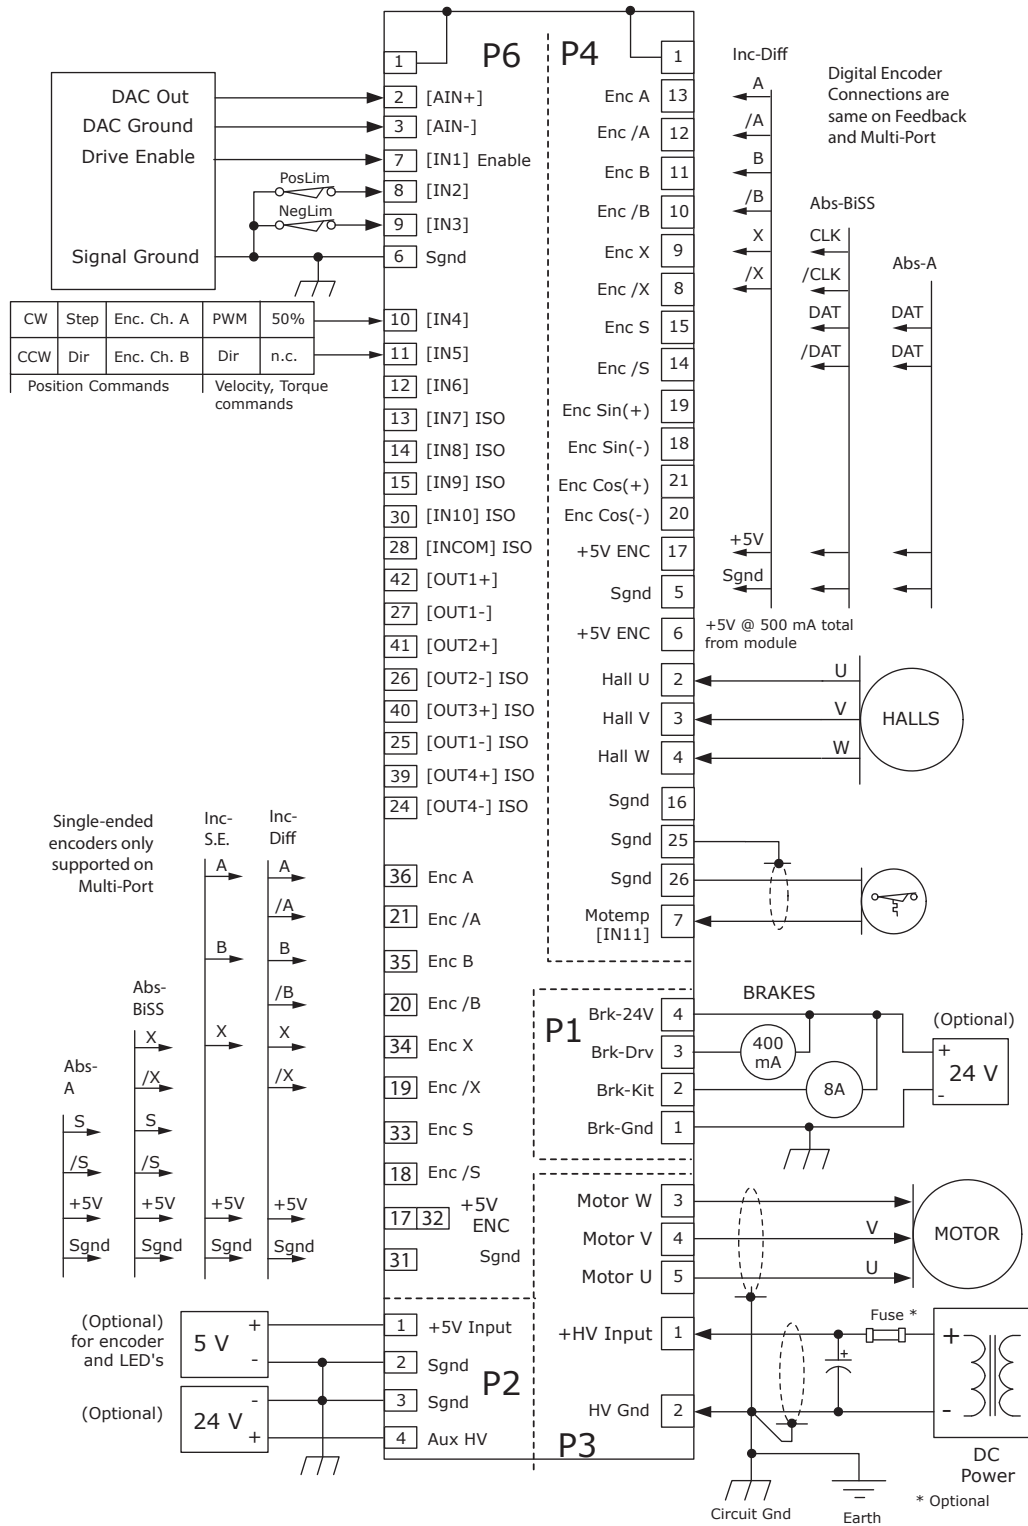


Argus R70

DEVELOPMENT KIT CONNECTORS


P1 BRAKE

Signal	Pin
BRK-GND	1
BRK-KIT	2
BRK-DRV	3
BRK-24V	4



P2 AUX HV & +5V

Signal	Pin
+5 Ext	1
Gnd	2
Gnd	3
Aux HV	4




P3 MOTOR & +HV POWER

Signal	Pin
+HV	1
HV Gnd	2
Motor W	3
Motor V	4
Motor U	5




P9 (See table on page 35)

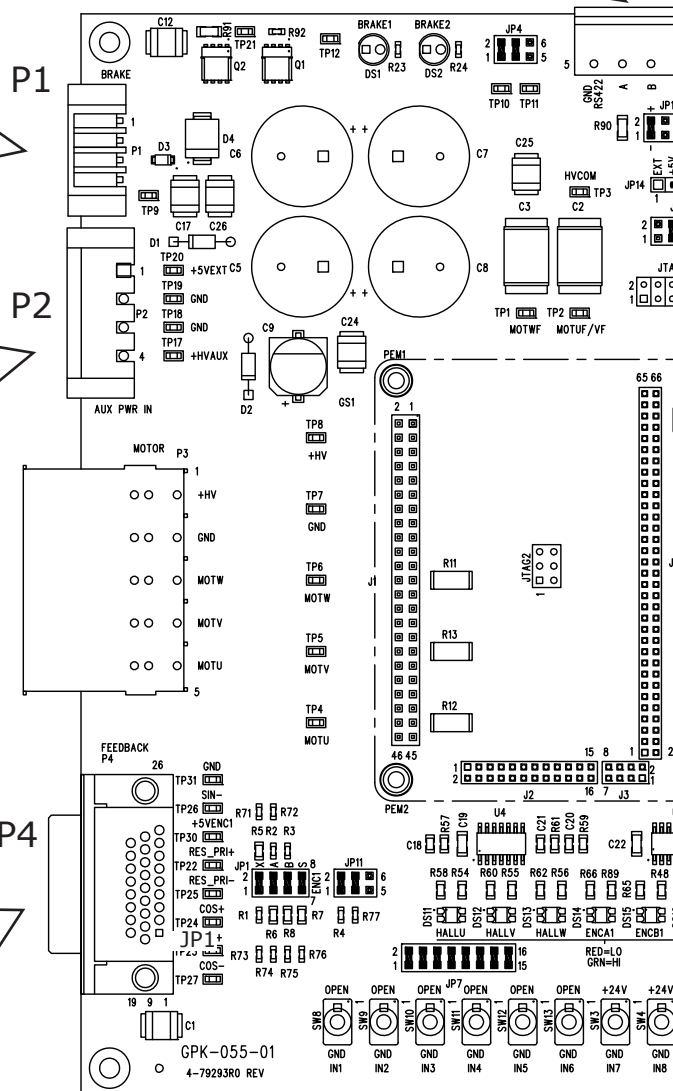

P4 FEEDBACK

INPUT SWITCHES

PIN	SIGNAL	PIN	SIGNAL	PIN	SIGNAL
26	Signal Gnd	18	Sin(-)	9	Enc X
25	Signal Gnd	17	+5V Enc	8	Enc /X
24	N.C.	16	Signal Gnd	7	[IN11] Motemp*
23	Rslvr Ref(+)	15	Enc S	6	+5V ENC
22	Rslvr Ref(-)	14	Enc /S	5	Signal Gnd
21	Cos(+)	13	Enc A	4	Hall W
20	Cos(-)	12	Enc /A	3	Hall V
19	Sin(+)	11	Enc B	2	Hall U
		10	Enc /B	1	Frame Gnd




* Signal connections on the PC board are affected by jumper placement

Argus R70

DEVELOPMENT KIT CONNECTIONS

P9 (See table below)

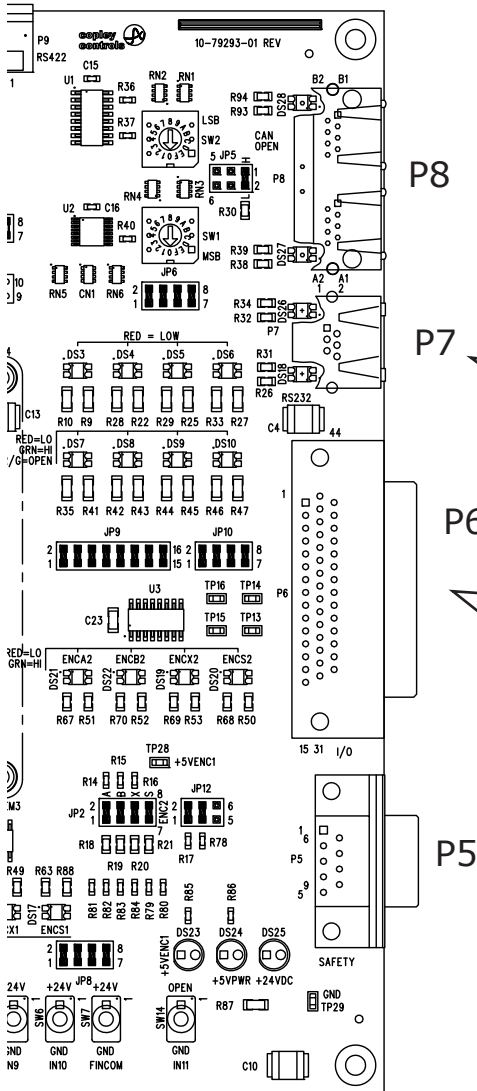

P8 CANOPEN

Pin	Signal
1	CAN_H
2	CAN_L
3	CAN_GND
4	Pass-thru
5	Pass-thru
6	Pass-thru
7	CAN_GND
8	Pass-thru

P7 RS-232


Pin	Signal
1	n.c.
2	RxD
3	Sgnd
4	Sgnd
5	TxD
6	n.c.

P6 CONTROL

PIN	SIGNAL	PIN	SIGNAL
1	Frame Gnd	16	Signal Gnd
2	[AIN-]	17	+5V ENC
3	[AIN+]	18	/S Multi-Port
4	[OUT8] SPI-EN1	19	/X Multi-Port
5	[OUT7] SPI-CLK	20	/B Multi-Port
6	Signal Gnd	21	/A Multi-Port
7	[IN1] HS	22	Signal Gnd
8	[IN2] HS	23	[OUT5]
9	[IN3] HS	24	[OUT4-] ISO
10	[IN4] HS	25	[OUT3-] ISO
11	[IN5] HS	26	[OUT2-] ISO
12	[IN6] HS	27	[OUT1-] ISO
13	[IN7] ISO	28	[INCOM] ISO
14	[IN8] ISO	29	N.C.
15	[IN9] ISO	30	[IN10] ISO


PIN	SIGNAL
31	Signal Gnd
32	+5V ENC
33	S Multi-Port
34	X Multi-Port
35	B Multi-Port
36	A Multi-Port
37	Signal Gnd
38	[OUT6] SPI-MOSI
39	[OUT4+] ISO
40	[OUT3+] ISO
41	[OUT2+] ISO
42	[OUT1+] ISO
43	N.C.
44	Signal Gnd

P9 RS-422



Pin	Signal
1	N.C.
2	N.C.
3	RS422(-)
4	RS422(+)
5	RS422-GND

P5 SAFETY



PIN	SIGNAL	PIN	SIGNAL
1	Frame Gnd	6	STO-IN1(+)
2	STO-IN1(+)	7	STO-IN1(-)
3	STO-IN1(-)	8	STO-24V
4	STO-IN2(+)	9	STO-GND
5	STO-IN2(-)		

ORDERING INFORMATION

ORDERING GUIDE

R70-055-60	R70 Servo Drive, 30/60 Adc, with encoder feedback
R70-055-60-R	R70 Servo Drive, 30/60 Adc, with resolver feedback
R70-090-60	R70 Servo Drive, 30/60 Adc, with encoder feedback
R70-090-60-R	R70 Servo Drive, 30/60 Adc, with resolver feedback



Example: Order one Argus Plus R70 drive, 30/60 Adc with resolver feedback, Development Kit, connector kit, Serial Cable Kit, and Heatsink Kit:

Qty	Item	Remarks
1	R70-055-60-R	Argus Plus R70 servo drive with resolver feedback
1	GPK-090-01	Development Kit
1	GPK-CK	Connector Kit
1	SER-CK	Serial Cable Kit
1	GPM-HK	Heatsink Kit

ACCESSORIES

	Qty	Ref	Name	Description	Manufacturer P/N
GPK-090-01				Development Kit for all R70 models	
GPK-CK Connector Kit for Development Kit	1	P3	HV & Motor	Plug, 5 position, 7.62 mm, female	Phoenix Contact: PC 5/5-STCL-7,62
	1	P1	Brake	Plug, 4 position, 3.5 mm, female	Wago: 734-104/107-000
	1			Strain relief, snap-on, 3.5 mm, 4 position, grey	Wago: 734-604
	1			Tool, wire insertion & extraction, 734 series	Wago: 734-231
	1	P2	Aux HV	Plug, 4 position, 5.08 mm, female	Wago: 231-304/107-000
	1	P5	Safety	Connector, DB-9M, 9-position, standard, male	TE/AMP: 205204-4
	9			AMPLIMITE HD-20 Crimp-Snap contacts, 24-20AWG, AU flash	TE/AMP: 66506-9
	1			Metal Backshell, DB-9, RoHS	3M: 3357-9209
	4			Jumper, with pins crimped on both ends	Copley: 10-75177-01
	1	P4	Feedback	Connector, high-density DB-26M, 26 position, male, solder cup	Norcomp: 180-026-103L001
	1			Metal Backshell, DB-15, RoHS	3M: 3357-9215
	1	P6	Control	Connector, high-density DB-44M, 44 position, male, solder cup	Norcomp: 180-044-103L001
	1			Metal Backshell, DB-25, RoHS	3M: 3357-9225
	1	P9	RS-422	Connector, terminal block, female, 0.20 in, 5-position	TE: 796634-5
SER-CK	1	P7	RS-232	Serial Cable Kit	
GPK-NC-10		P8	Network	CANopen network cable, 10 ft (3 m)	
GPK-NC-01				CANopen network cable, 1 ft (0.3 m)	
GPK-NT				CANopen Network Terminator	
GPM-HK				Heatsink kit	

Revision	Date	Remarks
00	June 13, 2018	Initial released version
01	April 24, 2019	Update photos

Note: Specifications subject to change without notice